


### Overview

### HPE ProLiant DL360 Gen10 Server

Does your data center need a secure, performance driven dense server that you can confidently deploy for virtualization, database, or high-performance computing? The HPE ProLiant DL360 Gen10 server delivers security, agility and flexibility without compromise.

The HPE ProLiant DL360 Gen10 Server supports the Intel® Xeon® Scalable Processor Family with up to 28 cores, plus 2933 MT/s HPE DDR4 SmartMemory supporting up to 3.0 TB max. With the added performance that HPE Persistent Memory and 10 NVMe bring, the HPE ProLiant DL360 Gen10 means business. Deploy this dense platform for diverse workloads in space constrained environments and maintain it with ease by automating the most essential server lifecycle management tasks with HPE OneView and HPE iLO 5.

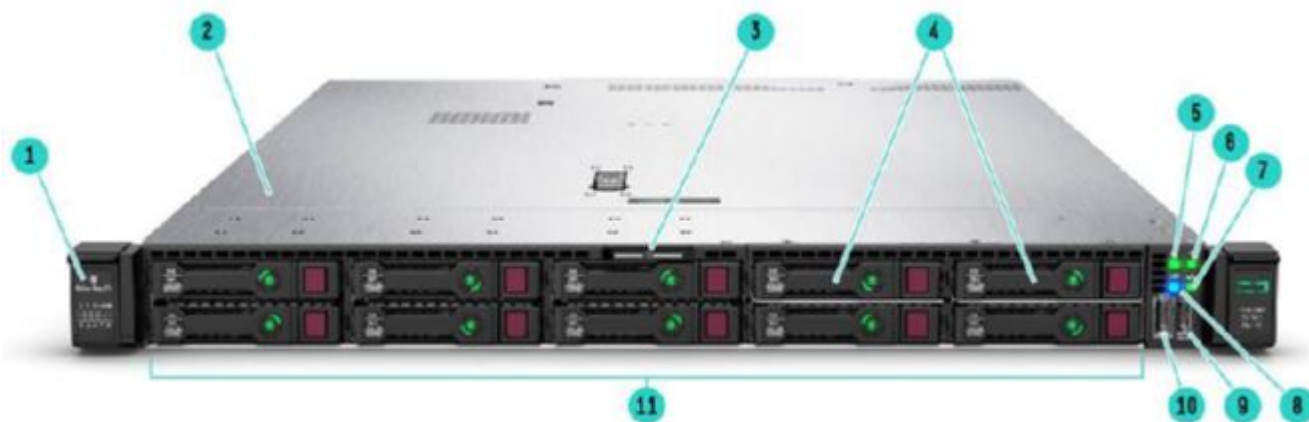


**8 SFF Front View - 8 SFF + 2 SFF- Universal Media Bay option shown**

- |                                                             |                                                 |
|-------------------------------------------------------------|-------------------------------------------------|
| 1. Drive support label                                      | 5. Power On/Standby button and system power LED |
| 2. Quick removal access panel                               | 6. Health LED                                   |
| 3. Serial no. label pull tab                                | 7. NIC status LED                               |
| 4. Universal Media Bay: +2 SFF SAS/SATA shown               | 8. UID button/LED                               |
| Option: +2 SFF NVMe drives                                  | 9. USB 3.0 port                                 |
| Option: DVD-RW or DVD-ROM + Display port & USB 2.0 port Kit | 10. iLO Service Port                            |
| Option: +2 Dual uFF (4x M.2 cartridges)                     | 11. Standard 8 SAS/SATA drive bays              |
| Option: Display port + USB 2.0 port Kit + Blank             |                                                 |

#### Notes:

- Rear drive option allows for an additional + 1 SFF or +1 Dual uFF (2x M.2 cartridges).
- System Insight Display (SID) module will include #5-9 above (will not include #10 - iLO Service Port).

### Overview

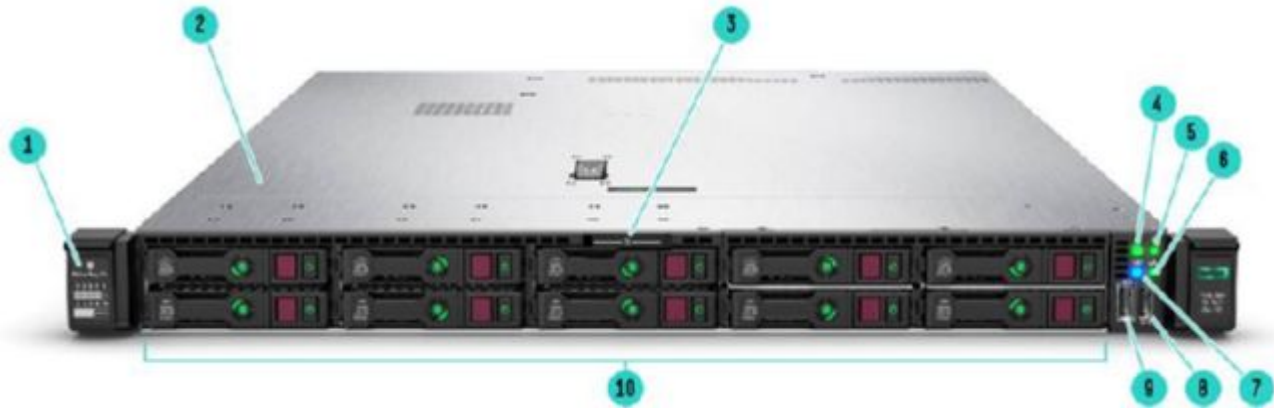


**Premium 10SFF NVMe Front View**

- |                                                 |                                                                                 |
|-------------------------------------------------|---------------------------------------------------------------------------------|
| 1. Drive support label                          | 6. NIC status LED                                                               |
| 2. Quick removal access panel                   | 7. UID button/LED                                                               |
| 3. Serial no. label pull tab                    | 8. USB 3.0 port                                                                 |
| 4. Power On/Standby button and system power LED | 9. iLO Service Port                                                             |
| 5. Health LED                                   | 10. Max up to 10 NVMe drives (PCIe direct attached) or 8 SAS/SATA/NVMe + 2 NVMe |

#### Notes:

- Rear drive option allows for an additional + 1 SFF or +1 Dual uFF (2x M.2 cartridges).
- System Insight Display (SID) module will include #4-8 above (will not include #9 - iLO Service Port).
- Does not support the Xeon-Gold 6250L or Gold 6250 processors.

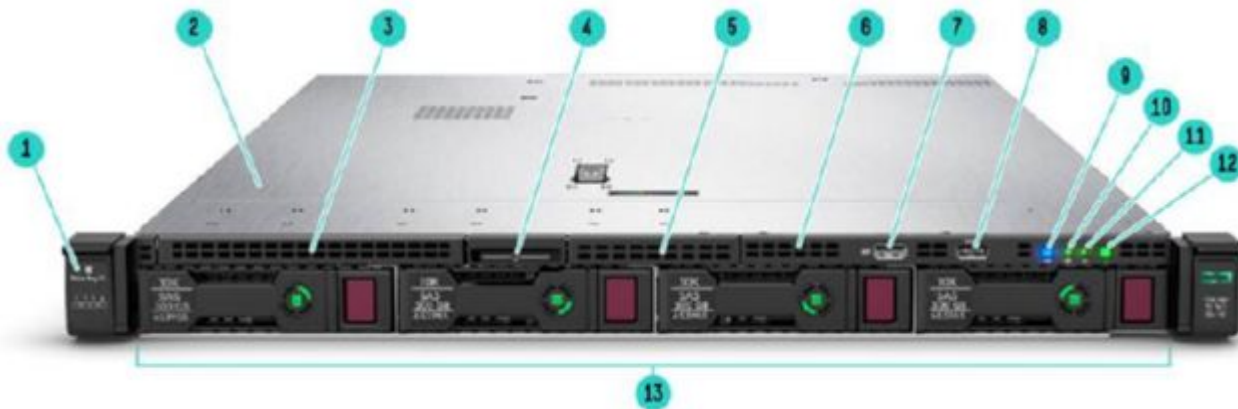


**4 LFF Front View - Standard 4 LFF shown**

- |                                                                       |                                                  |
|-----------------------------------------------------------------------|--------------------------------------------------|
| 1. Drive support label                                                | 8. USB 3.0 Port                                  |
| 2. Quick removal access panel                                         | 9. UID button/LED                                |
| 3. Option: DVD-RW or DVD-ROM (blank shown)                            | 10. Power On/Standby button and system power LED |
| 4. Serial no. label pull tab                                          | 11. Health LED                                   |
| 5. Option: Display port & USB 2.0 port Kit (blank shown)              | 12. NIC status LED                               |
| 6. Option: System insight Display (SID) - standard shown <sup>6</sup> | 13. SAS/SATA drive bays                          |
| 7. iLO Service Port                                                   |                                                  |

#### Notes:

- <sup>6</sup> This option will lose #7 iLO Service Port.
- Rear drive option allows for additional + 1 SFF or +1 Dual uFF (2x M.2 cartridges), will lose one FH PCIe slot.

### Overview

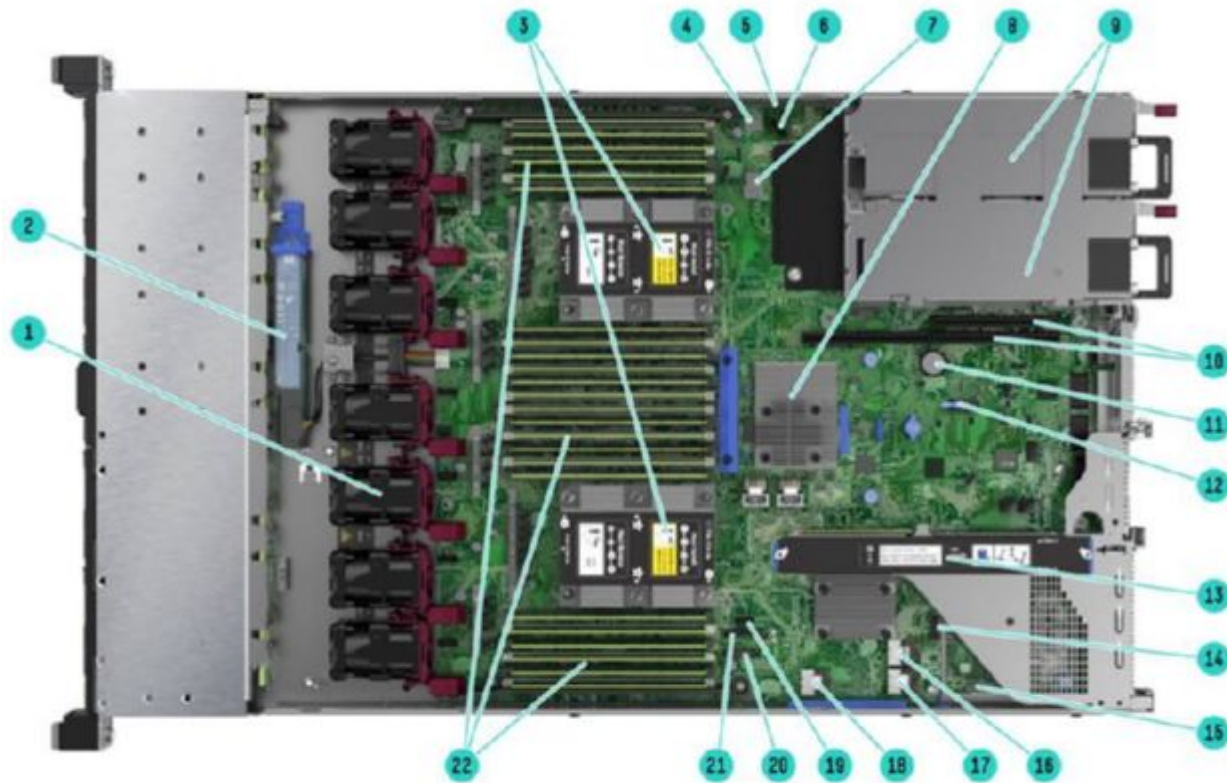

#### Internal View - Standard for all DL360 Gen10

- |                                                                                                                                                                                    |                                                                                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. For 8 SFF or 4 LFF - Standard single rotor hot plug fans<sup>1</sup></p> <p>1 CPU - 5 standard fans</p> <p>2 CPUs - 7 standard fans</p> <p>Option: High Performance fans</p> | <p>13. Primary (CPU1) PCIe 3.0 riser (Standard: GPU power connector + 1x 16 and 1x 8)</p> <p>Option: 2 SATA M.2 + 2x 16</p> <p>Option: (8 SFF only): 2x 4 NVMe + 1x 16 and 1x 8</p> |
| <p>2. Option: HPE Smart Hybrid Capacitor or HPE Smart Storage Battery</p>                                                                                                          | <p>14. Option: Front Display port / USB 2.0</p>                                                                                                                                     |
| <p>3. Up to 2 processors (shown with standard heat sinks)</p>                                                                                                                      | <p>15. FlexibleLOM (supports various NICs up to 25GbE)</p>                                                                                                                          |
| <p>4. MicroSD card slot</p>                                                                                                                                                        | <p>16. x4 SATA port 1</p>                                                                                                                                                           |
| <p>5. Option: Chassis Intrusion Detection</p>                                                                                                                                      | <p>17. x4 SATA port 2</p>                                                                                                                                                           |
| <p>6. Hard Drive backplane power connector</p>                                                                                                                                     | <p>18. x2 SATA port 3</p>                                                                                                                                                           |
| <p>7. Dual internal USB 3.0 connector</p>                                                                                                                                          | <p>19. x1 SATA port 4</p>                                                                                                                                                           |
| <p>8. Smart Array Controller (Type -a shown)</p>                                                                                                                                   | <p>20. Front Power USB 3.0 connector</p>                                                                                                                                            |
| <p>9. Up to 2 Power Supplies for redundant power</p>                                                                                                                               | <p>21. Optical/SATA port 5</p>                                                                                                                                                      |
| <p>10. Secondary (CPU2) PCIe 3.0 riser</p> <p>Option: Full Height x16 (Lose slot 2 on Primary riser)<sup>10</sup></p>                                                              | <p>22. DDR4 DIMM slots (Fully populated 24 DIMMs shown)</p>                                                                                                                         |
| <p>11. System Battery</p>                                                                                                                                                          |                                                                                                                                                                                     |


### Overview

12. Optional: TPM 2.0

#### Notes:

–<sup>1</sup> For 10 NVMe chassis - 7 High Performance fans

–<sup>10</sup> For 10 NVMe chassis - Secondary Riser is not available due to 10 x4 NVMe riser for PCIe direct attached

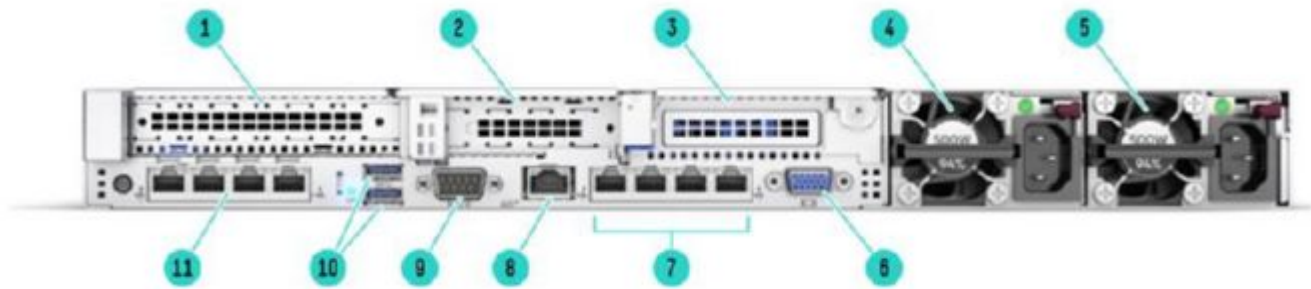

#### Rear View - Standard for all DL360 Gen10

- |                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1. Slot 1 PCIe 3.0</p> <p>Option: Rear Drive +1 SFF or 1 uFF SSD (2x M.2 cartridges)<sup>1</sup></p> <p>2. Slot 2 PCIe 3.0</p> <p>3. Option: Slot 3 PCIe 3.0 (Requires 2<sup>nd</sup> processor)</p> <p>4. Power Supply 2</p> <p>5. Power Supply 1</p> <p>6. VGA port</p> | <p>7. Embedded 4x 1GbE Adapter (if equipped)<sup>7</sup></p> <p>8. iLO Management Port</p> <p>9. Option: Serial Port</p> <p>10. USB 3.0 Ports</p> <p>11. Option: FlexibleLOM (Shown: 4x 1GbE)<sup>11</sup></p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

#### Notes:

–<sup>1</sup> Will lose FH x16 PCIe slot1 with this option.

–<sup>7</sup> Network Choice (NC) models do not include embedded LOM. Customer choice of FlexibleLOM for networking capability.

–<sup>11</sup> Supports Various NICs up to 25GbE.

### What's New

- Pensando Distributed Services Platform for HPE iLO Management ALOM Module
- HPE NVMe Mixed-Used HH PCIe Workload Accelerator Cards (1.6TB/3.2TB/6.4TB)
- HPE SN1610E Fibre Channel HBAs
- Intel® Xeon-Gold 6250L processor support
- Pensando Distributed Services Platform DSC-25 10/25G 2-port SFP28 Card for HPE and associated software
- HPE Ethernet 10/25Gb 2-port 642SFP28 Adapter
- HPE SAS Read-Intensive SFF SSDs (960GB/1.92TB/3.84TB/7.68TB/15.36TB)
- HPE SAS Mixed-Use SFF SSDs (800GB/1.6TB/3.2TB/6.4TB)
- HPE SAS Write-Intensive SFF SSDs (400GB/800GB/1.6TB)
- HPE NVMe Read-Intensive SFF SSDs (960GB/1.92TB/3.84TB/7.68TB/15.36TB)
- HPE NVMe Mixed-Use SFF SSDs (800GB/1.6TB/3.2TB/6.4TB/12.8TB)

### Overview

- Additional primary networking choices for the HPE ProLiant DL360 Gen10 Networking Choice (NC) Configure-to-Order (CTO) Chassis. In addition to FlexibleLOMs, select stand-up card networking options noted in "HPE Networking" section, add flexibility in the primary networking choice when configuring a DL360 Gen10 NC CTO Chassis
- 

### Platform Information

#### Form Factor

- 1U rack

#### Chassis Types

- 8 SFF with options supporting: +2 SFF or 2 NVMe or 2 Dual uFF (4x M.2 cartridges)
- 10 SFF NVMe Premium
- 4 LFF

**Notes:** Rear drive option available on all DL360 Gen10 chassis types for additional boot/storage: +1SFF or 1 Dual uFF (2x M.2 cartridges).

### System Fans

- Single rotor hot plug fans will be included

#### For 4 LFF and 8 SFF chassis:

- 1 CPU - Includes 5 standard fans
- 2 CPUs - Includes 7 standard fans

#### Notes:

- Optional High Performance Fan Kit available (includes 7 fans).
- The DL360 Gen10 will support up to 7 fans with fan redundancy built in. One fan rotor failure will place server in degraded mode but fully functional. Two fan rotor failures could provide warning and imminent server shutdown.

#### For 10 NVMe Premium chassis:

- 2 CPUs - Includes 7 high performance fans as standard
-



### Standard Features

**Processors** - Up to 2 of the following depending on model.

**Notes:**

- The 2nd digit of the processor model number "x1xx" and "x2xx" is used to denote the processor generation (i.e. 1=1st generation and 2=2nd generation)
- Field upgrades from 1<sup>st</sup> generation processors (x1xx) to 2<sup>nd</sup> generation processors (x2xx) not supported.
- "U" processors (i.e. 6212U) only supported in single socket configurations
- This table covers the public Intel offering only.
- For more information regarding Intel Xeon processors, please see the following <http://www.intel.com/xeon>.

Intel Xeon Processor		
Processor Suffix	Description	Offering
L	Large memory tier	Up to 4.5 TB addressable memory per socket
M	Medium memory tier	Up to 2.0 TB addressable memory per socket
N	NFV Optimized	Targeted at Network Function Virtualization (NFV) workloads. Intel® SST-BF improves performance by directing base frequency to high priority/bottleneck cores, other workloads may see throttling.
R	Refresh	Improved price/performance over equivalent "non-R" 2 <sup>nd</sup> generation processors
S	Search Optimized	Optimized base frequency to address 'search' workloads, other workloads may see throttling.
U	1 Socket Optimized	Focused on single socket (1P) configurations deliver performance at competitive price points. Does not support two socket (2P) arrangements.
V	VM Density Optimized	Fosters enhanced VM density, allowing to support more/larger virtual machines per host.
Y	Speed Select	Intel® SST-PP increases base frequency when fewer cores are enabled. Allows greater flexibility, deployment options and platform longevity.

**Notes:** More than 1.5 TB memory per socket requires HPE Persistent Memory

2 <sup>nd</sup> Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Platinum 8280 Processor	2.7 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8280L Processor	2.7 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2933 MT/s	4.5TB
Platinum 8280M Processor	2.7 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2933 MT/s	2TB
Platinum 8276 Processor	2.2 GHz	28	38.50 MB	165W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8276L Processor	2.2 GHz	28	38.50 MB	165W	3 @ 10.4 GT/s	2933 MT/s	4.5TB

### Standard Features

Platinum 8276M Processor	2.2 GHz	28	38.50 MB	165W	3 @ 10.4 GT/s	2933 MT/s	2TB
Platinum 8270 Processor	2.7 GHz	26	35.75 MB	205W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8268 Processor	2.9 GHz	24	35.75 MB	205W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8260 Processor	2.4 GHz	24	35.75 MB	165W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8260L Processor	2.4 GHz	24	35.75 MB	165W	3 @ 10.4 GT/s	2933 MT/s	4.5TB
Platinum 8260M Processor	2.4 GHz	24	35.75 MB	165W	3 @ 10.4 GT/s	2933 MT/s	2TB
Platinum 8260Y Processor	2.4 GHz	24	35.75 MB	165W	3 @ 10.4 GT/s	2933 MT/s	1TB
	2.5 GHz	20					
	2.7 GHz	16					
Platinum 8256 Processor	3.8 GHz	4	16.50 MB	105W	3 @ 10.4 GT/s	2933 MT/s	1TB
Platinum 8253 Processor	2.2 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2933 MT/s	1TB

#### Notes:

- 6-Channel DDR4 @ 2933 MT/s.
- 6TB max RAM (larger than 2TB memory per socket on select SKUs)
- Support for: HPE Persistent Memory, Vector Neural Network Instructions (VNNI) for inference acceleration.
- 2 and 4 socket capable, 2S - 2UPI, 2S - 3UPI, 4S - 3UPI @ 10.4 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, advanced RAS

### 1st Generation Intel® Xeon® Scalable Processor Family

Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Platinum 8180M Processor	2.5 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2666 MT/s	1.5TB
Platinum 8180 Processor	2.5 GHz	28	38.50 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768GB
Platinum 8176 Processor	2.1 GHz	28	38.50 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768GB
Platinum 8170 Processor	2.1 GHz	26	35.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768GB
Platinum 8168 Processor	2.7 GHz	24	33.00 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768GB

### Standard Features

Platinum 8165 Processor	2.3 GHz	24	33.00 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768GB
Platinum 8164 Processor	2.0 GHz	26	35.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Platinum 8160M Processor	2.1 GHz	24	33.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	1.5TB
Platinum 8160 Processor	2.1 GHz	24	33.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Platinum 8158 Processor	3.0 GHz	12	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Platinum 8156 Processor	3.6 GHz	4	16.50 MB	105W	3 @ 10.4 GT/s	2666 MT/s	768GB
Platinum 8153 Processor	2.0 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768GB

#### Notes:

- 6-Channel 1DPC DDR4 @ 2666 MT/s.
- 768 GB max memory capacity (1.5 TB on select skus)
- 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI, 8S - 3UPI @ 10.4 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, advanced RAS.

### 2<sup>nd</sup> Generation Intel® Xeon® Scalable Processor Family

Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Gold 6262V Processor	1.9 GHz	24	33.00 MB	135W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6258R Processor	2.7 GHz	28	38.50 MB	205W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6256 Processor	3.6 GHz	12	33.00 MB	205W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6254 Processor	3.1 GHz	18	24.75 MB	200W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6252 Processor	2.1 GHz	24	35.75 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6252N Processor	2.3 GHz	24	35.75MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6250L Processor	3.9 GHz	8	35.75MB	185W	3 @ 10.4 GT/s	2933 MT/s	4.5TB



### Standard Features

Gold 6250 Processor	3.9 GHz	8	35.75MB	185W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6248R Processor	3.0 GHz	24	35.75 MB	205W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6248 Processor	2.5 GHz	20	27.5 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6246R Processor	3.4 GHz	16	35.75 MB	205W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6246 Processor	3.3 GHz	12	24.75 MB	165W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6244 Processor	3.6 GHz	8	24.75 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6242R Processor	3.1 GHz	20	35.75 MB	205W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6242 Processor	2.8 GHz	16	22 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6240R Processor	2.4 GHz	24	35.75 MB	165W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6240 Processor	2.6 GHz	18	24.75 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6240Y Processor	2.6 GHz 2.8 GHz 3.1 GHz	18 14 8	24.75 MB	150W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6240L Processor	2.6 GHz	18	24.75 MB	150W	3 @ 10.4 GT/s	2933 MT/s	4.5TB
Gold 6240M Processor	2.6 GHz	18	24.75 MB	150W	3 @ 10.4 GT/s	2933 MT/s	2TB
Gold 6238R Processor	2.2 GHz	28	38.50 MB	165W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6238 Processor	2.1 GHz	22	30.25 MB	140W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6238L Processor	2.1 GHz	22	30.25 MB	140W	3 @ 10.4 GT/s	2933 MT/s	4.5TB
Gold 6238M Processor	2.1 GHz	22	30.25 MB	140W	3 @ 10.4 GT/s	2933 MT/s	2TB
Gold 6234 Processor	3.3 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2933 MT/s	1TB

### Standard Features

Gold 6230R Processor	2.1 GHz	26	35.75 MB	150W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6230 Processor	2.1 GHz	20	27.5 MB	125W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6230N Processor	2.3 GHz	20	27.50 MB	125W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6226R Processor	2.9 GHz	16	22 MB	150W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6226 Processor	2.7 GHz	12	19.25 MB	125W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6222V Processor	1.8 GHz	20	27.50 MB	115W	3 @ 10.4 GT/s	2933 MT/s	1TB
Gold 6212U Processor	2.4 GHz	24	35.75 MB	165W	N/A	2933 MT/s	1TB
Gold 6210U Processor	2.5 GHz	20	27.50 MB	150W	N/A	2933 MT/s	1TB
Gold 6209U Processor	2.1 GHz	20	27.50 MB	125W	N/A	2933 MT/s	1TB
Gold 6208U Processor	2.9 GHz	16	22 MB	150W	N/A	2933 MT/s	1TB
Gold 5222 Processor	3.8 GHz	4	16.5 MB	105W	2 @ 10.4 GT/s	2933 MT/s	1TB
Gold 5220R Processor	2.2 GHz	24	35.75 MB	150W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5220 Processor	2.2 GHz	18	24.75 MB	125W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5220S Processor	2.7 GHz	18	24.75 MB	125W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5218R Processor	2.1 GHz	20	27.50 MB	125W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5218 Processor	2.3 GHz	16	22 MB	125W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5218N Processor *	2.3 GHz	16	22 MB	110W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5218B Processor *	2.3 GHz	16	22 MB	125W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5217 Processor	3.0 GHz	8	11 MB	115W	2 @ 10.4 GT/s	2666 MT/s	1TB
Gold 5215 Processor	2.5 GHz	10	13.75 MB	85W	2 @ 10.4 GT/s	2666 MT/s	1TB

### Standard Features

Gold 5215L Processor	2.5 GHz	10	13.75 MB	85W	2 @ 10.4 GT/s	2666 MT/s	4.5TB
Gold 5215M Processor	2.5 GHz	10	13.75 MB	85W	2 @ 10.4 GT/s	2666 MT/s	2TB

### Notes:

- \* 5218B has consistent features with the 5218 processor but from a different die. Mixing both 5218B & 5218 in a system is not supported
- 6-Channel DDR4 @ 2933 MT/s (Gold 6200 & 5222 skus only), 2666 MT/s on all Gold 5200 skus (except 5222 @ 2933 MT/s).
- 6TB max RAM (larger than 2TB memory per socket on select SKUs)
- Support for: HPE Persistent Memory, Vector Neural Network Instructions (VNNI) for inference acceleration.
- 2 and 4 socket capable, 2S - 2UPI, 2S - 3UPI, 4S - 3UPI @ 10.4 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, advanced RAS

1 <sup>st</sup> Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Gold 6154 Processor	3.0 GHz	18	24.75 MB	200W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6152 Processor	2.1 GHz	22	30.25 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6150 Processor	2.7 GHz	18	24.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6148 Processor	2.4 GHz	20	27.50 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6146 Processor	3.2 GHz	12	24.75 MB	165W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6144 Processor	3.5 GHz	8	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6143 Processor	2.8 GHz	16	22.00 MB	205W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6142 Processor	2.6 GHz	16	22.00 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6140 Processor	2.3 GHz	18	24.75 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6138 Processor	2.0 GHz	20	27.50 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6136 Processor	3.0 GHz	12	24.75 MB	150W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6134M Processor	3.2 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2666 MT/s	1.5TB
Gold 6134 Processor	3.2 GHz	8	24.75 MB	130W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6132 Processor	2.6 GHz	14	19.25 MB	140W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6130 Processor	2.1 GHz	16	22.00 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 6128 Processor	3.4 GHz	6	19.25 MB	115W	3 @ 10.4 GT/s	2666 MT/s	768GB

### Standard Features

Gold 6126 Processor	2.6 GHz	12	19.25 MB	125W	3 @ 10.4 GT/s	2666 MT/s	768GB
Gold 5122 Processor	3.6 GHz	4	16.50 MB	105W	2 @ 10.4 GT/s	2666 MT/s	768GB
Gold 5120 Processor	2.2 GHz	14	19.25 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768GB
Gold 5118 Processor	2.3 GHz	12	16.50 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768GB
Gold 5117 processor	2.0GHz	14	19.25 MB	105W	2 @ 10.4 GT/s	2400 MT/s	768GB
Gold 5115 Processor	2.4 GHz	10	13.75 MB	85W	2 @ 10.4 GT/s	2400 MT/s	768GB

### Notes:

- 6-Channel 1DPC DDR4 @ 2400 MT/s (SKU 5122 - supports 2666 MT/s).
- 768 GB max memory capacity (1.5 TB on select skus).
- 2 and 4 socket capable, 2S - 2UPI, 4S - 3UPI @ 10.4 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (1x 512-bit FMA) (SKU 5122 - supports 2x 512 bit FMA).
- 48 lanes PCIe 3.0, advanced RAS.

2 <sup>nd</sup> Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Silver 4216 Processor	2.1 GHz	16	22 MB	100W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4215R Processor	3.2 GHz	8	11 MB	130W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4215 Processor	2.5 GHz	8	11 MB	85W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4214R Processor	2.4 GHz	12	16.5 MB	100W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4214Y Processor	2.2 GHz	12	16.5 MB	85W	2 @ 9.6 GT/s	2400 MT/s	1TB
	2.3 GHz	10					
	2.4 GHz	8					
Silver 4214 Processor	2.2 GHz	12	16.5 MB	85W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4210R Processor	2.4 GHz	10	13.75 MB	100W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4210 Processor	2.2 GHz	10	13.75 MB	85W	2 @ 9.6 GT/s	2400 MT/s	1TB
Silver 4208 Processor	2.1 GHz	8	11 MB	85W	2 @ 9.6 GT/s	2400 MT/s	1TB

### Notes:

- 6-Channel DDR4 @ 2400 MT/s.
- 2TB max RAM
- Support for: HPE Persistent Memory (Silver 4215 and 4215R only), Intel® Vector Neural Network Instructions (VNNI) for inference acceleration.
- 2 and 4 socket capable, 2S - 2UPI, 2S - 3UPI, 4S - 3UPI @ 9.6 GT/s.

### Standard Features

- Intel Turbo Boost Technology, Intel Hyper-Threading Technology Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, standard RAS

1st Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Silver 4116 Processor	2.1 GHz	12	16.50 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768GB
Silver 4114 Processor	2.2 GHz	10	13.75 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768GB
Silver 4112 Processor	2.6 GHz	4	8.25 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768GB
Silver 4110 Processor	2.1 GHz	8	11.00 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768GB
Silver 4108 Processor	1.8 GHz	8	11.00 MB	85W	2 @ 9.6 GT/s	2400 MT/s	768GB

#### Notes:

- 6-Channel DDR4 @ 2400 MT/s, 768 GB max memory capacity.
- 2 socket capable, 2S - 2UPI @ 9.6 GT/s.
- Intel Turbo Boost Technology, Intel Hyper-Threading Technology, Intel AVX-512 (1x 512-bit FMA).
- 48 lanes PCIe 3.0, standard RAS

2nd Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Bronze 3204 Processor	1.9 GHz	6	8.25 MB	85W	2 @ 9.6 GT/s	2133 MT/s	1 TB
Bronze 3206R Processor	1.9 GHz	8	11 MB	85W	2 @ 9.6 GT/s	2133 MT/s	1 TB

#### Notes:

- 6-Channel DDR4 @ 2133 MT/s.
- 2TB max RAM
- Support for: Intel® Vector Neural Network Instructions (VNNI) for inference acceleration..
- 2 and 4 socket capable, 2S - 2UPI, 2S - 3UPI, 4S - 3UPI @ 9.6 GT/s.
- Intel AVX-512 (2x 512-bit FMA).
- 48 lanes PCIe 3.0, standard RAS

1st Generation Intel® Xeon® Scalable Processor Family							
Intel Xeon Models	CPU Frequency	Cores	L3 Cache	Power	UPI	DDR4	Memory per socket
Bronze 3106 Processor	1.7 GHz	8	11.00 MB	85W	2 @ 9.6 GT/s	2133 MT/s	768GB
Bronze 3104 Processor	1.7 GHz	6	8.25 MB	85W	2 @ 9.6 GT/s	2133 MT/s	768GB

#### Notes:

- 6-Channel DDR4 @ 2133 MT/s, 768 GB max memory capacity.
- 2 socket capable, 2S - 2UPI @ 9.6 GT/s.
- Intel AVX-512 (1x 512-bit FMA).
- 48 lanes PCIe 3.0, standard RAS.

### Standard Features

---

#### Chipset

Intel C621 Chipset

**Notes:** For more information regarding Intel® chipsets, please see the following URL:  
<https://www.intel.com/content/www/us/en/products/chipsets/server-chipsets.html>

#### System Management Chipset

HPE iLO 5 ASIC

**Notes:** Read and learn more in the [iLO QuickSpecs](#).

---

#### Memory

<b>Type</b>	HPE DDR4 SmartMemory	Registered (RDIMM), Load Reduced (LRDIMM)
<b>DIMM Slots Available</b>	24	12 DIMM slots per processor, 6 channels per processor, 2DIMMs per channel
<b>Maximum capacity (LRDIMM)</b>	3.0 TB	24 x 128 GB LRDIMM @ 2933 MT/s
<b>Maximum capacity (RDIMM)</b>	1.54 TB	24 x 64 GB RDIMM @ 2933 MT/s
<b>Maximum capacity (HPE Persistent Memory)</b>	6.0 TB	12 X 512 GB HPE Persistent Memory Kit @ 2666 MT/s
<b>Maximum capacity (NVDIMM)</b>	192 GB	12 x 16 GB NVDIMM @ 2666 MT/s

#### Notes:

- NVDIMMs are only supported on 1st generation Intel Xeon Scalable Processors and can only be mixed with RDIMMs.
  - HPE Persistent Memory only supported on 2<sup>nd</sup> generation Intel Xeon Scalable Processor series (Platinum 8200, Gold 6200, Gold 5200, Silver 4215 and 4215R)
  - Maximum memory per socket is dependent on processor selection. 2<sup>nd</sup> generation processors supporting 2 TB or 4.5 TB per CPU are indicated by the "M" and "L" in the processor model names (i.e. 8276M and 8276L). 1<sup>st</sup> generation processors supporting 1.5 TB per CPU are indicated by the "M" in the processor model names (i.e. 8160M)
  - Mixing of RDIMM and LRDIMM memory is not supported.
  - For General Server Memory and Persistent Memory Population Rules and Guidelines for Gen10 see details here: <http://www.hpe.com/docs/memory-population-rules>
- 

#### Memory Protection

##### Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multibit error that occurs within a single DRAM chip.

##### Online Spare

Memory online spare mode detects a rank that is degrading and switches operation to the spare rank.

**Notes:** For more information see our [Memory RAS feature technical whitepaper](#).

---



### Standard Features

#### Expansion Slots

Primary GPU Riser					
Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
1	PCIe 3.0	x16	x16	CPU1	Full-height, 3/4 length (up to 9.5in)
2	PCIe 3.0	x8	x8	CPU1	Low Profile

Primary SATA M.2 Riser					
Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
1	PCIe 3.0	x16	x16	CPU 1	Full-height; 3/4 length (up to 9.5in)
2	PCIe 3.0	x16	x16	CPU 1	Low Profile

Primary NVMe Riser					
Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
1	PCIe 3.0	x16	x16	CPU 1	Full-height; 3/4 length (up to 9.5")
2	PCIe 3.0	x8	x8	CPU 1	Low Profile

Secondary Riser*					
Expansion Slots #	Technology	Bus Width	Connector Width	Processor	Slot Form Factor
3	PCIe 3.0	x16	x16	CPU 2	Low Profile or Full-height; 3/4 length (up to 9.5")

**Notes:** If secondary full height kit is installed, then primary PCIe Slot #2 cannot be used. Only 2 full height slots are supported.

### Internal Storage Devices

- **Optical Drive**

Available on 8 SFF and 4 LFF CTO Servers as an option (DVD-ROM or DVD-RW)

- **Hard Drives**

None ship standard

### Storage Controllers

### Standard Features

#### Software RAID

HPE Smart Array S100i SR Gen10 SW RAID

#### Notes:

- All models come with the S100i Smart Array Controller with embedded software RAID support for up to 12 bays. The S100i uses 14 embedded SATA ports, but only 12 are available for bays as 2 are leveraged to support the M.2 connectors on the optional SATA M.2 capable primary riser (867978-B21).
- HPE Smart Array S100i SR Gen10 SW RAID will operate in UEFI mode only. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22.
- HPE Smart Array S100i SR Gen10 SW RAID is off by default and must be enabled.
- The S100i supports Microsoft Windows Server only.
- For Linux users, HPE offers a solution that uses in-distro open-source software to create a two-disk RAID 1 boot volume. For more information visit: <https://downloads.linux.hpe.com/SDR/project/lsrrb/>

#### Essential RAID Controllers

- HPE Smart Array E208i-a SR Gen10 Controller
- HPE Smart Array E208i-a SR G10 LH Controller
- HPE Smart Array E208i-p SR Gen10 Controller
- HPE Smart Array E208e-p SR Gen10 Controller

#### Performance RAID Controllers

- HPE Smart Array P408i-a SR Gen10 Controller
- HPE Smart Array P408i-a SR G10 LH Controller
- HPE Smart Array P408i-p SR Gen10 Controller
- HPE Smart Array P408e-p SR Gen10 Controller
- HPE Smart Array P816i-a SR Gen10 Controller
- HPE Smart Array P816i-a SR G10 LH Controller

#### Notes:

- If GPGPU is needed then the LH controller (low profile heatsink) should be ordered to allow GPU to fit in the chassis.
- For additional details, please see [HPE Smart Array Gen10 Controllers Data Sheet](#).

### Maximum Storage

Storage	Capacity	Configuration
Hot Plug SFF SAS HDD	26.4 TB	8+2+1 x 2.4 TB (with optional UMB + rear drive option)
Hot Plug SFF SATA HDD	22 TB	8+2+1 x 2.0 TB (with optional UMB + rear drive option)
Hot Plug SFF SAS SSD	168.3 TB	8+2+1 x 15.3 TB (with optional UMB + rear drive option)
Hot Plug SFF SATA SSD	84.48 TB	8+2+1 x 7.68 TB (with optional UMB + rear drive option)
Hot Plug SFF NVMe PCIe SSD	153.6 TB	10 x 15.36 TB NVMe
Hot Plug LFF SAS HDD	64 TB	4 x 16 TB
Hot Plug LFF SATA HDD	64 TB	4 x 16 TB
Hot Plug LFF SAS SSD	7.68 TB	4 x 1.92 TB
Hot Plug LFF SATA SSD	7.68 TB	4 x 1.92 TB

### Graphics

- Integrated video standard
- Video modes up to 1920 x 1200 @ 60 Hz (32 bpp)

### Standard Features

- 16 MB Video Memory
- HPE iLO 5 on system management memory
- 32 MB Flash
- 4 Gbit DDR3 with ECC protection

### Power Supply

- HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  
**Notes:** Available in 94% efficiency.
- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  
**Notes:**
  - Available in 94% and 96% efficiency.
  - Also available in -48VDC and 227VAC/380VDC power inputs.
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit  
**Notes:**
  - Available in 94% efficiency.
  - 1600W Power supplies only support high line voltage (200 VAC to 240 VAC).

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

---

## Operating Systems and Virtualization Software

### 2<sup>nd</sup> Generation Intel® Xeon® Scalable Processor Family

- Windows Server 2019: Essentials, Standard, Datacenter
- **Windows Server 2016:** Essentials, Standard, Datacenter
- **Windows Server 2012 R2:** Essentials, Standard, Datacenter
- Microsoft Hyper-V Server: 2012 R2, 2016 & 2019
- VMware vSphere: 6.0 U3, 6.5 U2 through U.3 & 6.7 U1 through U3  
**Notes:** 6.5 U3, 6.7 U3 & 7.0 minimums for Xeon "R", Gold 6256, Gold 6250L & Gold 6250 processors.
- ClearVM: 7.6 & 8.0
- **Red Hat Enterprise Linux (RHEL):** 7.6 w/ Kbase \*\*, 7.7, 8.0, and 8.1
- **SUSE Linux Enterprise Server (SLES):** 12 SP3 & SP4, 15 and 15 SP1 (includes Xen) \*\*

### 1<sup>st</sup> Generation Intel® Xeon® Scalable Processor Family

- Windows Server 2019: Essentials, Standard & Datacenter
- **Windows Server 2016:** Essentials, Standard & Datacenter

### Standard Features

- **Windows Server 2012 R2:** Essentials, Standard & Datacenter
- Microsoft Hyper-V Server: 2012 R2, 2016 & 2019
- VMware vSphere: 6.0 U3, 6.5 through U.3 & 6.7 through U3
- ClearVM: 2.0
- **Red Hat Enterprise Linux (RHEL):** 6.9 & 7.3\*\*
- **SUSE Linux Enterprise Server (SLES):** 11 SP4, 12 SP2 & 15 (includes Xen) \*\*

Notes: \*\*64-bit only; includes KVM

- **ClearOS**

Notes: ClearOS allows you to build a fully functional server that is just right for you at no upfront cost. For more information on ClearOS, please visit <http://www.hpe.com/servers/clearos>.

- **CentOS**

Notes: For more information on Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server.

<http://www.hpe.com/info/ossupport>

### HPE Server UEFI/Legacy ROM

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen10 servers have a UEFI Class 2 implementation and support both UEFI Mode (default) and Legacy BIOS Mode.

Notes: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <http://www.hpe.com/servers/uefi>.

### Interfaces

<b>Serial</b>	1 port - Optional
<b>Video</b>	1 Front - Display port (optional 8 SFF and 4 LFF only)  1 Rear - VGA port (standard on all chassis types)  Notes: Both ports are not active simultaneously.
<b>Network Ports</b>	4x 1GbE embedded NIC (if equipped/depending on model) 1 FlexibleLOM slot available on all chassis types (supporting various NICs adapters)
<b>iLO Remote Mgmt Port</b>	1 Gb Dedicated
<b>MicroSD Slot</b>	1 MicroSD slot  Notes: The MicroSD slot is not hot-pluggable. server must be powered down before removal.
<b>USB 3.0</b>	Up to 5 total: 1 front, 2 rear, 2 internal (standard on all chassis types)  +1 optional USB 2.0 front (on 8 SFF and 4 LFF only)
<b>SID (Systems Insight Display)</b>	Optional for all chassis types  Notes: Will lose iLO Service Port if selecting this option.

### Industry Standard Compliance

### Standard Features

- ACPI 6.1 Compliant
- PCIe 3.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 3.0 Compliant
- USB 2.0 Compliant (only on optional Universal Media Bay)
- SMBIOS 3.1
- UEFI 2.6 (Unified Extensible Firmware Interface Forum)
- Redfish API
- IPMI 2.0
- Secure Digital 4.0
- TPM 1.2 and 2.0 support
- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line (SMASH CLP)
- Active Directory v1.0
- ASHRAE A3/A4
- Energy Star
- European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot 9 requirements. For more information regarding HPE Lot 9 conformance, please visit:  
<https://www.hpe.com/us/en/about/environment/msds-specs-more/erp-lot9-servers.html>

**Notes:** For additional technical thermal details regarding ambient temperatures, humidity and features support please visit: <http://www.hpe.com/servers/ashrae>.

### UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

Learn more at <http://www.hpe.com/servers/uefi>.

---

### Embedded Management

#### HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO.

Learn more at <http://www.hpe.com/info/ilo>.

---

### HPE Server UEFI/Legacy ROM

**UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:**

- Secure Boot and Secure Start enable for enhanced security
  - Operating system specific functionality
  - Support for > 2.2 TB (using GPT) boot drives
  - USB 3.0 Stack
-

### Standard Features

- Embedded UEFI Shell
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- PXE boot support for IPv6 networks
- Workload Profiles for simple performance optimization

### UEFI Boot Mode only:

- TPM 2.0 Support
- NVMe Boot Support
- Platform Trust Technology (PTT) can be enabled.
- iSCSI Software Initiator Support.
- HTTP/HTTPs Boot support as a PXE alternative.
- Boot support for option cards that only support a UEFI option ROM

### Notes:

- For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.
  - UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen10 Server.
- 

### Intelligent Provisioning

Hassle free server and OS provisioning for one or more servers with Intelligent Provisioning.

Learn more at <http://www.hpe.com/servers/intelligentprovisioning>.

---

### iLO RESTful API

iLO RESTful API is Redfish API conformance and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <http://www.hpe.com/info/restfulapi>.

---

### Server Utilities

#### Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <http://www.hpe.com/servers/ahs>.

#### Active Health System Viewer

Use the Active Health System Viewer, a web-based portal, to easily read AHS logs and speed problem resolution with HPE self-repair recommendations, to learn more visit: <http://www.hpe.com/servers/ahsv>.

#### Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP). Learn more at <https://www.hpe.com/us/en/servers/smart-update.html>.

#### iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a

---



### Standard Features

free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers at unmatched speed and scale. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <http://www.hpe.com/servers/iLOamplifierpack>.

### HPE iLO Mobile Application

Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <http://www.hpe.com/info/ilo/mobileapp>.

### RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <http://www.hpe.com/info/resttool>.

### Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell.

Learn more at <http://www.hpe.com/servers/stk> and <http://www.hpe.com/servers/powershell>.

### HPE OneView Standard

HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. It can monitor multiple HPE server generations. The user interface is similar to the HPE OneView Advanced version, but the software-defined functionality is not available. Learn more at <http://www.hpe.com/info/oneview>.

### HPE Systems Insight Manager (HPE SIM)

Ideal for environments already using HPE SIM, it allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers. Also provides you with basic support for non-HPE servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at <http://www.hpe.com/info/hpesim>.

---

### Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Pointnext operational services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

**Notes:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h17007.www1.hpe.com/us/en/enterprise/servers/warranty/>.

---

### Security

---

### Standard Features

- UEFI Secure Boot and Secure Start support
  - Immutable Silicon Root of Trust
  - FIPS 140-2 validation
  - Common Criteria certification
  - Configurable for PCI DSS compliance
  - Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
  - Support for Commercial National Security Algorithms (CNSA)
  - iLO Security Modes
  - Granular control over iLO interfaces
  - Smart card (PIV/CAC) and Kerberos based 2-factor Authentication
  - Tamper-free updates - components digitally signed and verified
  - Secure Recovery - recover critical firmware to known good state on detection of compromised FW
  - Ability to rollback firmware
  - Secure erase of NAND
  - TPM (Trusted Platform Module) 1.2 option
  - TPM (Trusted Platform Module) 2.0 option
  - Bezel Locking Kit
  - Chassis Intrusion detection option
-

### Optional Features

#### Server Management

##### HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at <http://www.hpe.com/servers/iloadvanced>.

##### HPE OneView Advanced

HPE OneView brings a new level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing Gen8, Gen9 and Gen10 servers. To learn more visit <http://www.hpe.com/info/oneview>.

##### HPE InfoSight for Servers

HPE InfoSight for Servers combines the cloud-based machine learning of InfoSight with the health and performance monitoring of Active Health System (AHS) and iLO to optimize performance and predict and prevent problems. The end result is an intelligent environment that modernizes IT operations and enhances the support experience by predicting and preventing the infrastructure issues that lead to application disruptions, wasted IT staff time and missed business opportunities.

Learn more at <https://www.hpe.com/servers/infosight>

##### HPE Insight Cluster Management Utility (CMU)

HPE Insight Cluster Management Utility is a HyperScale management framework that includes software for the centralized provisioning, management and monitoring of nodes and infrastructure. Learn more at <http://www.hpe.com/info/cmu>.

##### Accelerator and GPGPU Information

Hewlett Packard Enterprise supports various accelerators on select HPE ProLiant servers to support different workloads. The accelerators enable seamless integration of GPU computing with HPE ProLiant servers for high-performance computing, large data center graphics, deep learning and virtual desktop deployments. These accelerators deliver all of the standard benefits of GPU computing while enabling maximum reliability and tight integration with system monitoring and management tools such as HPE Insight Cluster Management Utility.

---

#### Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go - and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

### Optional Features

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10 year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type workload. Some UPSs include options for remote management and extended runtime modules so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

---

### One Config Simple (SCE)

SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance. <https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

---

### Service and Support

#### HPE Pointnext - Service and Support

##### Protect your business beyond warranty with HPE Pointnext Operational Service

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provides innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. HPE is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.

---

##### Connect your devices:

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to HPE support.

##### Notes:

- <sup>1</sup>IDC
- <sup>2</sup>HPE CSC reports 2014 - 2015

Learn more about getting connected at <http://www.hpe.com/services/getconnected>.

---

#### Recommended Services

##### HPE Proactive Care\* with 6 hour call-to-repair commitment, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years' proactive reporting and advice with our highest level of hardware support - HPE's 24x7, six hour hardware call-to-repair. HPE is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers. <https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

##### HPE Proactive Care\* with 24x7 coverage, three year Support Service

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This Service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software

### Service and Support

Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

#### **HPE Proactive Care\* - Next Business Day service, three year Support Service**

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years of Hardware Support where an HPE authorized representative will arrive at the Customer's site during the onsite coverage window to begin hardware maintenance service the next coverage day after the service request has been logged. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your HPE servers.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

**Notes:** \*HPE Proactive Care and HPE Proactive Care Advanced require that the customer connect their devices to make the most of these services and receive all the deliverables.

---

### Other related Services

#### **HPE Server Hardware Installation**

Provides for the basic hardware installation of HPE branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

<https://h20195.www2.hpe.com/v2/Getdocument.aspx?docname=5981-9356enw>

#### **HPE Installation and Startup Service**

Provides for the installation of your HPE hardware according to product specifications including options. The HPE service delivery technician will connect the product to a LAN as appropriate and enable remote support to allow for automatic case creation for hardware failures. Installation and start up services also includes the installation of one supported operating system type (Windows® or Linux).

#### **HPE Datacenter Care service**

HPE Datacenter Care helps improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services "building blocks." You can deploy, operate, and evolve your datacenter wherever you are on your IT journey. With HPE Datacenter Care, you benefit from a personalized relationship with HPE via a single point of accountability for HPE and others' products.

For more information, visit <http://www.hpe.com/services/datacentercare>

#### **HPE GreenLake Flex Capacity**

With HPE GreenLake Flex Capacity, you get the speed, scalability, and economics of the public cloud in the privacy of your data center. Gain the advantages of the public cloud-consumption-based payment, rapid scalability without worrying about capacity constraints. Reduce the "heavy lifting" needed to operate a data center. And retain the advantages that IT provides the business (i.e., control, security). Deliver the right user experience, choose the right technology for the business, manage privacy and compliance, and manage the cost of IT. And, you have the option to use the public cloud when needed.



### Service and Support

#### DC for Hyperscale

Datacenter Care for Hyperscale is available for Service Providers and HPC customers who use a scale out approach to computing with a high volume homogenous infrastructure and resilient architecture can take advantage of this environment support tailored to their operating model.

#### HPE Factory Express for Servers and storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the MSAxxxx3PAR suite, XP, rackable tape libraries and configurable network switches.

#### HPE Service Credits

HPE Service Credits offers flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

#### HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>

---

#### HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers. Learn more <http://www.hpe.com/support/hpesc>.

The HPE Support Center Mobile App\* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

**Notes:**\*HPE Support Center Mobile App is subject to local availability.

For more information: <http://www.hpe.com/services>.

### Service and Support

**Notes:** HPE ProLiant DL360 Gen10 Server is covered under the HPE Service Contract applied to the HPE ProLiant Server. No separate HPE support services need to be purchased.

Warranty and Support Services will extend to include HPE options configured with your server or storage device. The price of support service is not impacted by configuration details. HPE sourced options that are compatible with your product will be covered under your server support at the same level of coverage allowing you to upgrade freely. Installation for HPE options is available as needed. To keep support costs low for everyone, some high value options will require additional support. Additional support is only required on select high value workload accelerators, fibre switches, InfiniBand and UPS batteries over 12KVA. See the specific high value options that require additional support [here](#).

---

### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

---

### Pre-Configured Models

- Pre-Configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.
- Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.
- If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot 9 requirements. For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more/erp-lot9-servers.html>

### Network Choice (NC) Models

Network Choice models do not include embedded LOM. FlexibleLOM is included in the configuration with customer choice of additional NIC (stand-up card)

Powered by 2 <sup>nd</sup> Generation Intel Xeon Processors			
Network Choice Models			China Specific Network Choice
<b>SKU Number</b>	P23578-xx1	P23579-xx1	P23575-AA1
<b>Model Name</b>	HPE ProLiant DL360 Gen10 4210R 2.4GHz 10-core 1P 16GB-R P408i-a NC 8SFF 500W PS Server	HPE ProLiant DL360 Gen10 4214R 2.4GHz 12-core 1P 32GB-R P408i-a NC 8SFF 500W PS Server	HPE ProLiant DL360 Gen10 3206R 1.9GHz 8-core 1P 16GB-R P408i-a NC 8SFF 500W PS Server
<b>Chassis</b>	8SFF	8SFF	8SFF
<b>Processor</b>	4210R (10-Core, 2.4 GHz, 100W)	4214R (12-Core, 2.4 GHz, 100W)	3206R (8 core, 1.9 GHz, 85W)
<b>Number of Processors</b>	One processor with standard heatsink	One processor with standard heatsink	One processor with standard heatsink
<b>Memory</b>	16 GB RDIMM 2R 2933 MT/s (1x 16 GB)  <b>Notes:</b> Runs at 2400 MT/s due to processor limitation.	32 GB RDIMM 2R 2933 MT/s (1x 32 GB)  <b>Notes:</b> Runs at 2400 MT/s due to processor limitation.	16 GB RDIMM 2R 2933 MT/s (1x 16 GB)  <b>Notes:</b> Runs at 2133 MT/s due to processor limitation.
<b>Network Controller</b>	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No embedded networking	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No embedded networking	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No

### Pre-Configured Models

			<a href="#">embedded networking</a>
<b>Storage Controller</b>	P408i-a/2GB with Smart Storage Battery	P408i-a/2GB with Smart Storage Battery	P408i-a/2GB with Smart Storage Battery
<b>Hard Drive</b>	None included	None included	None included
<b>Optical Drive</b>	Not included (Optical Drive options available)	Not included (Optical Drive options available)	Not included (Optical Drive options available)
<b>PCIe Slots</b>	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP
<b>Power Supply</b>	1x 500W	1x 500W	1x 500W
<b>Fans</b>	5 - Standard	5 - Standard	5 - Standard
<b>Management</b>	HPE iLO 5	HPE iLO 5	HPE iLO 5
<b>Rail Kit</b>	SFF Easy Install w/o CMA		
<b>Energy Star</b>	Energy Star 3.0		
<b>Form Factor</b>	1U Rack		
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response.		
<b>Localizations Available</b>	-B21, -291, -AA1	-B21, -291, -AA1	-AA1

**Notes:** UEFI is the standard default for all Pre-configured models.

### Country Code Key

- xx1 = B21 Worldwide
- xx1 = 291 Japan
- xx1 = AA1 PRC

**Notes:** The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

### Powered by 2<sup>nd</sup> Generation Intel Xeon Processors

#### Network Choice Models

SKU Number	P23577-xx1	P24740-xx1	P24741-xx1
<b>Model Name</b>	HPE ProLiant DL360 Gen10 4215R 3.2GHz 8-core 1P 32GB-R S100i NC 8SFF 800W PS Server	HPE ProLiant DL360 Gen10 5218R 2.1GHz 20-core 1P 32GB-R S100i NC 8SFF 800W PS Server	HPE ProLiant DL360 Gen10 5220R 2.2GHz 24-core 1P 32GB-R S100i NC 8SFF 800W PS Server
<b>Chassis</b>	8SFF	8SFF	8SFF
<b>Processor</b>	4215R (8-Core, 3.2 GHz, 130W)	5218R (20-Core, 2.1 GHz, 125W)	5220R (24 core, 2.2 GHz, 150W)
<b>Number of Processors</b>	One processor with High Performance heatsink	One processor with standard heatsink	One processor with High Performance heatsink
<b>Memory</b>	32 GB RDIMM 2R 2933 MT/s  (1x 32 GB)  <a href="#">Notes: Runs at 2400 MT/s due to processor limitation.</a>	32 GB RDIMM 2R 2933 MT/s  (1x 32 GB)  <a href="#">Notes: Runs at 2666 MT/s due to processor limitation.</a>	32 GB RDIMM 2R 2933 MT/s  (1x 32 GB)  <a href="#">Notes: Runs at 2666 MT/s due to processor limitation.</a>
<b>Network Controller</b>	HPE Ethernet 10 GbE 2P 562FLR-T  <a href="#">Notes: No embedded networking</a>	HPE Ethernet 10 GbE 2P 562FLR-T  <a href="#">Notes: No embedded networking</a>	HPE Ethernet 10 GbE 2P 562FLR-T  <a href="#">Notes: No embedded networking</a>
<b>Storage Controller</b>	Embedded 14-port S100i <a href="#">Notes: SATA only.</a>	Embedded 14-port S100i <a href="#">Notes: SATA only.</a>	Embedded 14-port S100i <a href="#">Notes: SATA only.</a>
<b>Hard Drive</b>	None included	None included	None included

### Pre-Configured Models

<b>Optical Drive</b>	Not included (Optical Drive options available)	Not included (Optical Drive options available)	Not included (Optical Drive options available)
<b>PCIe Slots</b>	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP
<b>Power Supply</b>	1x 800W	1x 800W	1x 800W
<b>Fans</b>	5 - Standard	5 - Standard	5 - Standard
<b>Management</b>	HPE iLO 5	HPE iLO 5	HPE iLO 5
<b>Rail Kit</b>	SFF Easy Install w/o CMA		
<b>Energy Star</b>	Energy Star 3.0		
<b>Form Factor</b>	1U Rack		
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response.		
<b>Localizations Available</b>	-B21, -291, -AA1	-B21, -291	-B21, -291

**Notes:** UEFI is the standard default for all Pre-configured models.

### Country Code Key

- xx1 = B21 Worldwide
- xx1 = 291 Japan
- xx1 = AA1 PRC

**Notes:** The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

### Powered by 2<sup>nd</sup> Generation Intel Xeon Processors

Network Choice Models		
<b>SKU Number</b>	P24742-xx1	P24743-xx1
<b>Model Name</b>	HPE ProLiant DL360 Gen10 6226R 2.9GHz 16-core 1P 32GB-R S100i NC 8SFF 800W PS Server	HPE ProLiant DL360 Gen10 6248R 3.0GHz 24-core 1P 32GB-R S100i NC 8SFF 800W PS Server
<b>Chassis</b>	8SFF	8SFF
<b>Processor</b>	6226R (16-Core, 2.9 GHz, 150W)	6248R (24-Core, 3.0 GHz, 205W)
<b>Number of Processors</b>	One processor with High Performance heatsink	One processor with High Performance heatsink
<b>Memory</b>	32 GB RDIMM 2R 2933 MT/s  (1x 32 GB)	32 GB RDIMM 2R 2933 MT/s  (1x 32 GB)
<b>Network Controller</b>	HPE Ethernet 10 GbE 2P 562FLR-T  <b>Notes:</b> No embedded networking	HPE Ethernet 10 GbE 2P 562FLR-T  <b>Notes:</b> No embedded networking
<b>Storage Controller</b>	Embedded 14-port S100i  <b>Notes:</b> SATA only.	Embedded 14-port S100i  <b>Notes:</b> SATA only.
<b>Hard Drive</b>	None included	None included
<b>Optical Drive</b>	Not included (Optical Drive options available)	Not included (Optical Drive options available)
<b>PCIe Slots</b>	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP
<b>Power Supply</b>	1x 800W	1x 800W
<b>Fans</b>	5 - Standard	5 - Standard
<b>Management</b>	HPE iLO 5	HPE iLO 5
<b>Rail Kit</b>	SFF Easy Install w/o CMA	
<b>Energy Star</b>	Energy Star 3.0	
<b>Form Factor</b>	1U Rack	
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response.	
<b>Localizations Available</b>	-B21, -291	-B21, -291

### Pre-Configured Models

**Notes:** UEFI is the standard default for all Pre-configured models.

### Country Code Key

- xx1 = B21 Worldwide
- xx1 = 291 Japan
- xx1 = AA1 PRC

**Notes:** The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

Powered by 2 <sup>nd</sup> Generation Intel Xeon Processors			
Network Choice Models			
SKU Number	P19771-xx1	P19772-xx1	P19780-xx1
<b>Model Name</b>	HPE ProLiant DL360 Gen10 5220 2.2GHz 18-core 2P 64GB-R P408i-a NC 8SFF 800W RPS Server	HPE ProLiant DL360 Gen10 6248 2.5GHz 20-core 2P 64GB-R P408i-a NC 8SFF 800W RPS Server	HPE ProLiant DL360 Gen10 3204 1.9GHz 6-core 1P 16GB-R S100i NC 4LFF 500W PS Server
<b>Chassis</b>	8SFF	8SFF	4LFF
<b>Processor</b>	5220 (18-Core, 2.2 GHz, 125W)	6248 (20-Core, 2.5 GHz, 150W)	3204 (6 core, 1.9 GHz, 85W)
<b>Number of Processors</b>	Two processors with standard heatsink	Two processors with High Performance heatsink	One processor with standard heatsink
<b>Memory</b>	64 GB RDIMM 2R 2933 MT/s (2x 32 GB) <b>Notes:</b> Runs at 2666 MT/s due to processor limitation.	64 GB RDIMM 2R 2933 MT/s (2x 32 GB)	16 GB RDIMM 2R 2933 MT/s (1x 16 GB) <b>Notes:</b> Runs at 2133 MT/s due to processor limitation.
<b>Network Controller</b>	HPE Ethernet 10/25 GbE 2P 640FLR-SFP28 <b>Notes:</b> No embedded networking	HPE Ethernet 10/25 GbE 2P 640FLR-SFP28 <b>Notes:</b> No embedded networking	HPE Ethernet 1Gb 4-port 366FLR Adapter <b>Notes:</b> No embedded networking
<b>Storage Controller</b>	P408i-a/2GB with Smart Storage Battery	P408i-a/2GB with Smart Storage Battery	Embedded 14-port S100i <b>Notes:</b> SATA only.
<b>Hard Drive</b>	None included	None included	None included
<b>Optical Drive</b>	Not included (Optical Drive options available)	Not included (Optical Drive options available)	Not included (Optical Drive options available)
<b>PCIe Slots</b>	3 PCIe: 1 x16 FH / 1 x8 LP + 1 x16 FH	3 PCIe: 1 x16 FH / 1 x8 LP + 1 x16 FH	2 PCIe: 1 x16 FH, 1 x8 LP
<b>Power Supply</b>	2x 800W	2x 800W	1x 500W
<b>Fans</b>	7 - Standard	7 - Standard	5 - Standard
<b>Management</b>	HPE iLO Advanced	HPE iLO Advanced	HPE iLO 5
<b>Rail Kit</b>	SFF Easy Install w/o CMA		
<b>Energy Star</b>	Energy Star 3.0		
<b>Form Factor</b>	1U Rack		
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response.		
<b>Localizations Available</b>	-B21, -291, -AA1	-B21, -291, -AA1	-291, -AA1

### Pre-Configured Models

**Notes:** UEFI is the standard default for all Pre-configured models.

### Country Code Key

- xx1 = B21 Worldwide
- xx1 = 291 Japan
- xx1 = AA1 PRC

**Notes:** The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

Powered by 2 <sup>nd</sup> Generation Intel Xeon Processors			
Network Choice Models			
SKU Number	P19774-xx1	P19776-xx1	P19779-xx1
Model Name	HPE ProLiant DL360 Gen10 4208 2.1GHz 8-core 1P 16GB-R P408i-a NC 8SFF 500W PS Server	HPE ProLiant DL360 Gen10 4208 2.1GHz 8-core 1P 16GB-R S100i NC 4LFF 500W PS Server	HPE ProLiant DL360 Gen10 4210 2.2GHz 10-core 1P 16GB- R P408i-a NC 8SFF 500W PS Server
Chassis	8SFF	4LFF	8SFF
Processor	4208 (8 core, 2.1 GHz, 85W)	4208 (8 core, 2.1 GHz, 85W)	4210 (10 core, 2.2 GHz, 85W)
Number of Processors	One processor	One processor	One processor
Memory	With standard heatsink	With standard heatsink	With standard heatsink
	16 GB RDIMM 2R 2933 MT/s  (1x 16 GB)  <b>Notes:</b> Runs at 2400 MT/s due to processor limitation.	16 GB RDIMM 2R 2933 MT/s  (1x 16 GB)  <b>Notes:</b> Runs at 2400 MT/s due to processor limitation.	16 GB RDIMM 2R 2933 MT/s  (1x 16 GB)  <b>Notes:</b> Runs at 2400 MT/s due to processor limitation.
Network Controller	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No embedded networking	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No embedded networking	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No embedded networking
Storage Controller	P408i-a/2GB with Smart Storage Battery	Embedded 14-port S100i  <b>Notes:</b> SATA only.	P408i-a/2GB with Smart Storage Battery
Hard Drive	None included	None included	None included
Optical Drive	Not included (Optical Drive options available)	Not included (Optical Drive options available)	Not included (Optical Drive options available)
PCIe Slots	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP
Power Supply	1x 500W	1x 500W	1x 500W
Fans	5 - Standard	5 - Standard	5 - Standard
Management	HPE iLO 5	HPE iLO 5	HPE iLO 5
Rail Kit	SFF Easy Install w/o CMA	LFF Easy Install w/o CMA	SFF Easy Install w/o CMA
Energy Star	Energy Star 3.0		
Form Factor	1U Rack		
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.		
Localizations Available	-B21, -291, -AA1	-B21, -291	-B21, -291, -AA1



### Pre-Configured Models

**Notes:** UEFI is the standard default for all Pre-configured models.

### Country Code Key

xx1 = B21 Worldwide

xx1 = 291 Japan

xx1 = AA1 PRC

**Notes:** The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

Powered by 2 <sup>nd</sup> Generation Intel Xeon Processors			
Network Choice Models			
<b>SKU Number</b>	P19775-xx1	P19176-xx1	P19777-xx1
<b>Model Name</b>	HPE ProLiant DL360 Gen10 4214 2.2GHz 12-core 1P 16GB-R P408i-a NC 8SFF 500W PS Server	HPE ProLiant DL360 Gen10 5217 3.0GHz 8-core 1P 32GB- R P408i-a NC 8SFF 800W PS Server	HPE ProLiant DL360 Gen10 5218 2.3GHz 16-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server
<b>Chassis</b>	8SFF	8SFF	8SFF
<b>Processor</b>	4214 (12 cores, 2.2GHz, 85W)	5217 (8 core, 3.0 GHz, 115W)	5218 (16 cores, 2.3 GHz, 125W)
<b>Number of Processors</b>	One processor  With standard heatsink	One processor  With standard heatsink	One processor  With standard heatsink
<b>Memory</b>	16GB RDIMM 2R 2933 MT/s (1x16GB)  <b>Notes:</b> Runs at 2400 MT/s due to processor limitation.	32GB RDIMM 2R 2933 MT/s (1x32GB)  <b>Notes:</b> Runs at 2666 MT/s due to processor limitation.	32GB RDIMM 2R 2933 MT/s (1x32GB)  <b>Notes:</b> Runs at 2666 MT/s due to processor limitation.
<b>Network Controller</b>	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No embedded <a href="#">networking</a>	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No embedded <a href="#">networking</a>	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No embedded <a href="#">networking</a>
<b>Storage Controller</b>	P408i-a/2GB with Smart Storage Battery	P408i-a/2GB with Smart Storage Battery	P408i-a/2GB with Smart Storage Battery
<b>Hard Drive</b>	None included	None included	None included
<b>Optical Drive</b>	Not included (Optical Drive options available)	Not included (Optical Drive options available)	Not included (Optical Drive options available)
<b>PCIe Slots</b>	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP
<b>Power Supply</b>	1x 500W	1x 800W	1x 800W
<b>Fans</b>	5 - Standard	5 - Standard	5 - Standard
<b>Management</b>	HPE iLO 5	HPE iLO 5	HPE iLO 5
<b>Rail Kit</b>	SFF Easy Install w/o CMA	SFF Easy Install w/o CMA	SFF Easy Install w/o CMA
<b>Energy Star</b>	Energy Star 3.0		
<b>Form Factor</b>	1U Rack		
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response.		
<b>Localizations Available</b>	-B21, -291, -AA1	-B21, -291	-B21, -291

### Pre-Configured Models

**Notes:** UEFI is the standard default for all Pre-configured models.

### Country Code Key

- xx1 = B21 Worldwide
- xx1 = 291 Japan
- xx1 = AA1 PRC

**Notes:** The -B21 WW SKU is to be ordered in all countries other than Japan.

Powered by 2 <sup>nd</sup> Generation Intel Xeon Processors			
Network Choice Models			
SKU Number	P19177-xx1	P19178-xx1	P19778-xx1
Model Name	HPE ProLiant DL360 Gen10 5220 2.2GHz 18-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server	HPE ProLiant DL360 Gen10 5222 3.8GHz 4-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server	HPE ProLiant DL360 Gen10 6230 2.1GHz 20-core 1P 32GB-R P408i-a NC 8SFF 800W PS Server
Chassis	8SFF	8SFF	8SFF
Processor	5220 (18-Core, 2.2 GHz, 125W)	5222 (4-core, 3.8 GHz, 105W)	6230 (20 cores, 2.1 GHz, 125W)
Number of Processors	One processor  With standard heatsink	One processor  With High Performance heatsink	One processor  With standard heatsink
Memory	32GB RDIMM 2R 2933 MT/s (1x32GB)  <b>Notes:</b> Runs at 2666 MT/s due to processor limitation.	32GB RDIMM 2R 2933 MT/s (1x32GB)	32GB RDIMM 2R 2933 MT/s (1x32GB)
Network Controller	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No embedded <a href="#">networking</a>	HPE Ethernet 10/25 GbE 2P 640FLR-SFP28  <b>Notes:</b> No embedded <a href="#">networking</a>	HPE Ethernet 1Gb 4-port 366FLR Adapter  <b>Notes:</b> No embedded <a href="#">networking</a>
Storage Controller	P408i-a/2GB with Smart Storage Battery	P408i-a/2GB with Smart Storage Battery	P408i-a/2GB with Smart Storage Battery
Hard Drive	None included	None included	None included
Optical Drive	Not included (Optical Drive options available)	Not included (Optical Drive options available)	Not included (Optical Drive options available)
PCIe Slots	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP
Power Supply	1x 800W	1x 800W	1x 800W
Fans	5 - Standard	5 - Standard	5 - Standard
Management	HPE iLO 5	HPE iLO 5	HPE iLO 5
Rail Kit	SFF Easy Install w/o CMA	SFF Easy Install w/o CMA	SFF Easy Install w/o CMA
Energy Star	Energy Star 3.0		
Form Factor	1U Rack		
Warranty	3-year parts, 3-year labor, 3-year onsite support with next business day response.		
Localizations Available	-B21, -291	-B21, -291	-B21, -291

### Pre-Configured Models

**Notes:** UEFI is the standard default for all Pre-configured models.

### Country Code Key

- xx1 = B21 Worldwide
- xx1 = 291 Japan
- xx1 = AA1 PRC

**Notes:** The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

### Powered by 2<sup>nd</sup> Generation Intel Xeon Processors

#### Network Choice Models

SKU Number	P19179-xx1	P19180-xx1	P24744-xx1
<b>Model Name</b>	HPE ProLiant DL360 Gen10 6234 3.3GHz 8-core 1P 32GB-R P408i-a NC 8SFF	HPE ProLiant DL360 Gen10 6242 2.8GHz 16-core 1P 32GB-R P408i-a NC 8SFF	HPE ProLiant DL360 Gen10 6250 3.9GHz 8-core 1P 32GB-R S100i NC 8SFF 800W PS Server
<b>Chassis</b>	8SFF	8SFF	8SFF
<b>Processor</b>	6234 (8-Core, 3.3 GHz, 130W)	6242 (16-Core, 2.8 GHz, 150W)	6250 (8-core, 3.9GHz, 185W)
<b>Number of Processors</b>	One processor  With High Performance heatsink	One processor  With High Performance heatsink	One processor with High Performance heatsink
<b>Memory</b>	32GB RDIMM 2R 2933 MT/s	32GB RDIMM 2R 2933 MT/s	32GB RDIMM 2R 2933 MT/s
<b>Network Controller</b>	HPE Ethernet 10/25 GbE 2P 640FLR-SFP28  <b>Notes:</b> No embedded networking	HPE Ethernet 10/25 GbE 2P 640FLR-SFP28  <b>Notes:</b> No embedded networking	HPE Ethernet 10 GbE 2P 562FLR-T  <b>Notes:</b> No embedded networking
<b>Storage Controller</b>	P408i-a/2GB with Smart Storage Battery	P408i-a/2GB with Smart Storage Battery	Embedded 14-port S100i  <b>Notes:</b> SATA only.
<b>Hard Drive</b>	None included	None included	None included
<b>Optical Drive</b>	Not included (Optical Drive options available)	Not included (Optical Drive options available)	Not included (Optical Drive options available)
<b>PCIe Slots</b>	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH, 1 x8 LP
<b>Power Supply</b>	1x 800W	1x 800W	1x 800W
<b>Fans</b>	5 - Standard	5 - Standard	7 - High Performance
<b>Management</b>	HPE iLO 5	HPE iLO 5	HPE iLO 5
<b>Rail Kit</b>	SFF Easy Install w/o CMA		
<b>Energy Star</b>	Energy Star 3.0		
<b>Form Factor</b>	1U Rack		
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response.		
<b>Localizations Available</b>	-B21, -291	-B21, -291	-B21, -291

### Pre-Configured Models

#### Notes:

- SKU P24744-xx1 does not support 2SFF cage upgrades, nor ambient temperatures exceeding 25C.
- UEFI is the standard default for all Pre-configured models.

### Country Code Key

- xx1 = B21 Worldwide
- xx1 = 291 Japan
- xx1 = AA1 PRC

**Notes:** The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

Powered by 1 <sup>st</sup> Generation Intel Xeon Processors		
<b>Embedded LOM Models</b>		
<b>SKU Number</b>	P06453-xx1	867962-xx1
<b>Model Name</b>	HPE ProLiant DL360 Gen10 4110 2.1GHz 8-core 1P 16GB-R P408i-a 8SFF 500W PS Performance Server	HPE ProLiant DL360 Gen10 4114 2.2GHz 10C 85W 1P 16G-2R P408i-a 8SFF 1x500W Base Server
<b>Chassis</b>	8SFF	8SFF
<b>Processor</b>	4110 (8 core, 2.1 GHz, 85W)	4114 (10-Core, 2.2 GHz, 85W)
<b>Number of Processors</b>	One processor With standard heatsink	One processor With standard heatsink
<b>Memory</b>	16 GB RDIMM 2R 2666 MT/s (1x 16 GB) <b>Notes:</b> Runs at 2400 MT/s due to processor limitation.	16 GB RDIMM 2R 2666 MT/s (1x 16 GB) <b>Notes:</b> Runs at 2400 MT/s due to processor limitation.
<b>Network Controller</b>	Embedded 4-port 1GbE	Embedded 4-port 1GbE
<b>Storage Controller</b>	P408i-a/2GB with Smart Storage Battery	P408i-a/2GB with Smart Storage Battery
<b>Hard Drive</b>	None included	None included
<b>Optical Drive</b>	Not included (Optical Drive options available)	Optional (requires both Drive and UMB)
<b>PCIe Slots</b>	2 PCIe: 1 x16 FH, 1 x8 LP	2 PCIe: 1 x16 FH / 1 x8 LP
<b>Power Supply</b>	1x 500W	1x 500W
<b>Fans</b>	5 - Standard	5 - Standard
<b>Management</b>	HPE iLO 5	HPE iLO 5
<b>Rail Kit</b>	SFF Easy Install w/o CMA	
<b>Energy Star</b>	Energy Star 2.1	
<b>Form Factor</b>	1U Rack	
<b>Warranty</b>	3-year parts, 3-year labor, 3-year onsite support with next business day response.	
<b>Localizations Available</b>	-B21, -291	-B21, -291, -AA1

**Notes:** UEFI is the standard default for all Pre-configured models.

### Country Code Key

- xx1 = B21 Worldwide
- xx1 = 291 Japan
- xx1 = AA1 PRC

**Notes:** The -B21 WW SKU is to be ordered in all countries other than Japan or PRC.

### Configuration Information

This section lists some of the steps required to configure a Factory Integrated Model.

To ensure valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on number of drives ordered with server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information

European Union (EU) eco-design regulations for server and storage products, known as Lot 9, go into effect on March 1st, 2020. Among other requirements, for servers this directive establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen10 servers are compliant with Lot 9 requirements.

For more information regarding HPE Lot 9 conformance, please visit:

<https://www.hpe.com/us/en/about/environment/msds-specs-more/erp-lot9-servers.html>

### Step 1: Base Configuration (choose one of the following configurable models)

#### Network Choice (NC) Models

Network Choice models do not include embedded LOM. To enable networking capability please select either a FlexibleLOM NIC or a validated alternative from the Core Options section.

CTO Server	HPE DL360 Gen10 4LFF NC CTO Server	HPE DL360 Gen10 8SFF NC CTO Server	HPE DL360 Gen10 Premium 10NVMe NC CTO Svr
<b>SKU Number</b>	P19765-B21	P19766-B21	P19767-B21
<b>TAA SKU*</b>	P19768-B21	P19769-B21	P19770-B21
<b>Processor</b>	Not included as standard		
<b>DIMM Slots</b>	24-DIMM slots (12 can be used for NVDIMMs or 12 can be used for HPE Persistent Memory)		
<b>Storage Controller</b>	Embedded SW RAID (S100i) with 14 SATA ports  Optional: Choice of HPE modular Smart Array and PCIe plug-in controller		
<b>PCIe</b>	2 PCIe slots (1 x16 FH / 1 x8 LP)  Optional: 1 x16 FH or LP		2 PCIe slots (1 x16 FH / 1 x8 LP)
<b>Drive Cage - included</b>	4 LFF - SAS/SATA	8 SFF - SAS/SATA  Optional: up to 2 NVMe or 2 Dual uFF (4x M.2 cartridges)	10 NVMe - SAS/SATA/NVMe  Optional: 1 Dual uFF (2x M.2 cartridges)
<b>Network Controller</b>	Choice of HPE FlexibleLOM for primary NIC and stand up card for additional NICs.  <a href="#">Notes: No embedded networking</a>		
<b>Fans</b>	1 CPU - 5 Standard Fans  2 CPU - 7 Standard Fans  Optional: High Performance Fans		2 CPU - 7 High Performance Fans
<b>Management</b>	HPE iLO with Intelligent Provisioning (standard)  Optional: iLO Advance and OneView		
<b>USB</b>	Front: 1 USB 3.0 + iLO service port  Rear: 2 USB 3.0		Front: 1 USB 3.0 + iLO service port

### Configuration Information

	Internal: 2 USB 3.0	Rear: 2 USB 3.0
	Optional: 1 USB 2.0 (lose iLO serv. Port)	Internal: 2 USB 3.0

#### Notes:

- \*HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country.
- HPE Persistent Memory is only supported on 2<sup>nd</sup> generation Intel Xeon Scalable processor series (Platinum 8200, Gold 6200, Gold 5200, Silver 4215 and 4215R).
- SKUs P19767-B21 & P19770-B21 do not support the Xeon-Gold 6250L or Gold 6250 processors.
- Must be selected for 2nd Generation Intel® Xeon® Scalable "Refresh" (R) Processors.

### CTO Models with embedded LOM

CTO Server	HPE DL360 Gen10 4LFF CTO Server	HPE DL360 Gen10 8SFF CTO Server
<b>SKU Number</b>	867958-B21	867959-B21
<b>TAA SKU*</b>	875965-B21	875966-B21
<b>Processor</b>	Not included as standard	
<b>DIMM Slots</b>	24-DIMM slots (12 can be used for NVDIMMs or 12 can be used for HPE Persistent Memory)	
<b>Storage Controller</b>	Embedded SW RAID (S100i) with 14 SATA ports	
	Optional: Choice of HPE modular Smart Array and PCIe plug-in controller	
<b>PCIe</b>	2 PCIe slots (1 x16 FH / 1 x8 LP)	
	Optional: 1 x16 FH or LP	
<b>Drive Cage - included</b>	4 LFF - SAS/SATA	8 SFF - SAS/SATA
		Optional: up to 2 NVMe or 2 Dual uFF (4x M.2 cartridges)
<b>Network Controller</b>	HPE 1Gb Ethernet 4-Port 331i Adapter plus optional HPE FlexibleLOM or stand up card	
<b>Fans</b>	1 CPU - 5 Standard Fans	
	2 CPU - 7 Standard Fans	
	Optional: High Performance Fans	
<b>Management</b>	HPE iLO with Intelligent Provisioning (standard)	
	Optional: iLO Advance and OneView	
<b>USB</b>	Front: 1 USB 3.0 + iLO service port	
	Rear: 2 USB 3.0	
	Internal: 2 USB 3.0	
	Optional: 1 USB 2.0 (lose iLO serv. Port)	

#### Notes:

- HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country.
- \*TAA chassis are only orderable in North America and Canada.
- HPE Persistent Memory is only supported on 2<sup>nd</sup> generation Intel Xeon Scalable processor series (Platinum 8200, Gold 6200, Gold 5200, Silver 4215 and 4215R).
- Configurations requiring 2nd Generation Intel® Xeon® Scalable "Refresh" (R) Processors must select Network Choice (NC) CTO Models.

### Configuration Information

---

#### Step 2: Choose Options

Please select one -L21 processor required below.

For second processor, please select the same processor model with -B21 from Core Options - HPE Processors section.

For example: first processor, select P02679-L21 then for second processor, select P02679-B21.

#### Notes:

- Mixing of 2 different processor models is not supported.
- For first processor, -L21 kit will include 5 fans. With the exception of Xeon-Gold 6256, Gold 6250L, Gold 6250, Gold 6212U, Gold 6210U, Gold 6209U & Gold 6208U processors, -B21 kits include 2 fans (for 4 LFF and 8 SFF CTO Server, 10 NVMe CTO Server always includes 7 High Performance fans).
- Processors with 130W or higher will ship with the High Performance heat sink plus SKUs 8256, 5222, 8156, 6128, 5122 as noted below. All other processors will ship with the Standard heat sink.
- When 2<sup>nd</sup> Generation Intel Xeon Scalable Processor is selected, then only DDR4-2933 Memory Kit can be selected; When 1<sup>st</sup> Generation Intel Xeon Scalable Processor is selected, then only DDR4-2666 Memory Kit can be selected.

#### Step 2a: Choose Processor Options

Processor Option Kits (Required Processor)	SKU
<b>2<sup>nd</sup> Generation Intel Xeon- Platinum</b>	
Intel Xeon-Platinum 8280 (2.7GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02679-L21
Intel Xeon-Platinum 8280L (2.7GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02718-L21
Intel Xeon-Platinum 8280M (2.7GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02703-L21
Intel Xeon-Platinum 8276 (2.2GHz/28-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02676-L21
Intel Xeon-Platinum 8276L (2.2GHz/28-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02715-L21
Intel Xeon-Platinum 8276M (2.2GHz/28-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02700-L21
Intel Xeon-Platinum 8270 (2.7GHz/26-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02673-L21
Intel Xeon-Platinum 8268 (2.9GHz/24-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02670-L21
Intel Xeon-Platinum 8260 (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02661-L21
Intel Xeon-Platinum 8260L (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02712-L21
Intel Xeon-Platinum 8260M (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 <b>Notes:</b> Ships with High Performance Heatsink.	P02694-L21
Intel Xeon-Platinum 8260Y (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02682-L21



### Configuration Information

#### Notes:

- 24/20/16 cores would result in 2.4/2.5/2.7 GHz operating points
- Ships with High Performance Heatsink.

Intel Xeon-Platinum 8256 (3.8GHz/4-core/105W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02655-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8253 (2.2GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02652-L21

#### 1<sup>st</sup> Generation Intel Xeon-Platinum

**Intel Xeon-Platinum 8180M (2.5GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10** 876099-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8180 (2.5GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 867988-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8176 (2.1GHz/28-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 870982-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8170 (2.1GHz/26-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 870980-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8168 (2.7GHz/24-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 870978-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8165 (2.3GHz/24-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 879121-L21

#### Notes:

- Ships with Performance Heatsink.
- Requires the High Performance Fan Kit (871244-B21)
- Supports "Core boosting" Learn more <http://www.hpe.com/info/ist>.
- To enable this feature an iLO Advanced, or iLO Advanced Premium Security edition License are required.

Intel Xeon-Platinum 8164 (2.0GHz/26-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 870976-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8160M (2.1GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 876093-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8160 (2.1GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 870974-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8158 (3.0GHz/12-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 874455-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8153 (2.0GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 870972-L21

#### 2<sup>nd</sup> Generation Intel Xeon-Gold

Intel Xeon-Gold 6262V (1.9GHz/24-core/135W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P11842-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6258R (2.7GHz/28-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24488-L21

#### Notes:

- Ships with High Performance Heatsink.
- Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 6256 (3.6GHz/12-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P23744-L21

### Configuration Information

**Notes:**

- Ships with High Performance Heatsink.
- Ambient temperature support up to 30C.
- High performance fans are required.

Intel Xeon-Gold 6254 (3.1GHz/18-core/200W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02649-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6252 (2.1GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02646-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6252N (2.3GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P11851-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6250L (3.9GHz/8-core/185W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P28257-L21

**Notes:**

- Ships with High Performance Heatsink.
- NVMe SSDs not supported with this processor.
- Not supported on Premium 10SFF NVMe chassis.
- Ambient temperature support up to 25C on 4LFF and 8SFF configurations. 2SFF cages not supported.
- High performance fans are required.

Intel Xeon-Gold 6250 (3.9GHz/8-core/185W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P23741-L21

**Notes:**

- Ships with High Performance Heatsink.
- NVMe SSDs not supported with this processor.
- Not supported on Premium 10SFF NVMe chassis.
- Ambient temperature support up to 25C on 4LFF and 8SFF configurations. 2SFF cages not supported.
- High performance fans are required.

Intel Xeon-Gold 6248R (3.0GHz/24-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24487-L21

**Notes:**

- Ships with High Performance Heatsink.
- Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 6248 (2.5GHz/20-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02640-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6246R (3.4GHz/16-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24486-L21

**Notes:**

- Ships with High Performance Heatsink.
- Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 6246 (3.3GHz/12-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P15443-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6244 (3.6GHz/8-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02634-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6242R (3.1GHz/20-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24485-L21

**Notes:**

- Ships with High Performance Heatsink.
- Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 6242 (2.8GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02628-L21

**Notes:** Ships with High Performance Heatsink.

## Configuration Information

Intel Xeon-Gold 6240R (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P24484-L21
<b>Notes:</b>	
– Ships with High Performance Heatsink.	
– Only qualified on Network Choice (NC) Models.	
Intel Xeon-Gold 6240 (2.6GHz/18-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02625-L21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6240Y (2.6GHz/18-14-8-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02613-L21
<b>Notes:</b>	
– 18/14/8 cores would result in 2.6/2.8/3.1 GHz operating points	
– Ships with High Performance Heatsink.	
Intel Xeon-Gold 6240L (2.6GHz/18-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02643-L21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6240M (2.6GHz/18-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02688-L21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6238R (2.2GHz/28-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P24483-L21
<b>Notes:</b>	
– Ships with High Performance Heatsink.	
– Only qualified on Network Choice (NC) Models.	
Intel Xeon-Gold 6238 (2.1GHz/22-core/140W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02637-L21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6238L (2.1GHz/22-core/140W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02658-L21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6238M (2.1GHz/22-core/140W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02691-L21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6234 (3.3GHz/8-core/130W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02604-L21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6230R (2.1GHz/26-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P24482-L21
<b>Notes:</b>	
– Ships with High Performance Heatsink.	
– Only qualified on Network Choice (NC) Models.	
Intel Xeon-Gold 6230 (2.1GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02607-L21
Intel Xeon-Gold 6230N (2.3GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P11848-L21
Intel Xeon-Gold 6226R (2.9GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P24481-L21
<b>Notes:</b>	
– Ships with High Performance Heatsink.	
– Only qualified on Network Choice (NC) Models.	
Intel Xeon-Gold 6226 (2.7GHz/12-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02601-L21
Intel Xeon-Gold 6222V (1.8GHz/20-core/115W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P11839-L21
Intel Xeon-Gold 6212U (2.4GHz/24-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02667-L21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6210U (2.5GHz/20-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02631-L21

### Configuration Information

#### Notes:

- Ships with High Performance Heatsink.
- Only supported in single socket configurations

Intel Xeon-Gold 6209U (2.1GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02622-L21

**Notes:** Only supported in single socket configurations

Intel Xeon-Gold 6208U (2.9GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24489-L21

#### Notes:

- Ships with High Performance Heatsink.
- Only supported in single socket configurations

Intel Xeon-Gold 5222 (3.8GHz/4-core/105W) FIO Processor Kit for HPE ProLiant DL360 Gen10. P02709-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 5220R (2.2GHz/24-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P15995-L21

#### Notes:

- Ships with High Performance Heatsink.
- Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 5220 (2.2GHz/18-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10. P02595-L21

Intel Xeon-Gold 5220S (2.7GHz/18-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02577-L21

Intel Xeon-Gold 5218R (2.1GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24480-L21

**Notes:** Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 5218 (2.3GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02592-L21

Intel Xeon-Gold 5218N (2.3GHz/16-core/110W) FIO Processor Kit for HPE ProLiant DL360 Gen10. P11845-L21

Intel Xeon-Gold 5218B (2.3GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10. P12516-L21

**Notes:** Consistent features with the 5218 processor but from a different die. Mixing both 5218B & 5218.

processors in a system is not supported

Intel Xeon-Gold 5217 (3.0GHz/8-core/115W) FIO Processor Kit for HPE ProLiant DL360 Gen10. P02589-L21

Intel Xeon-Gold 5215 (2.5GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02586-L21

Intel Xeon-Gold 5215L (2.5GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10. P02706-L21

Intel Xeon-Gold 5215M (2.5GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10. P02568-L21

#### 1<sup>st</sup> Generation Intel Xeon-Gold

Intel Xeon-Gold 6154 (3.0GHz/18-core/200W) FIO Processor Kit for HPE ProLiant DL360 Gen10 870970-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6152 (2.1GHz/22-core/140W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860677-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6150 (2.7GHz/18-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860675-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6148 (2.4GHz/20-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860673-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6146 (3.2GHz/12-core/165W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860671-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6144 (3.5GHz/8-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 870966-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6143 (2.8GHz/16-core/205W) FIO Processor Kit for HPE ProLiant DL360 Gen10 879118-L21

## Configuration Information

## Notes:

- Ships with Performance Heatsink.
- Requires the High Performance Fan Kit (871244-B21)
- Supports "Core boosting" Learn more <http://www.hpe.com/info/ist>.
- To enable this feature an iLO Advanced, or iLO Advanced Premium Security edition License are required.

Intel Xeon-Gold 6142 (2.6GHz/16-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860669-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6140 (2.3GHz/18-core/140W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860667-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6138 (2.0GHz/20-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 870968-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6136 (3.0GHz/12-core/150W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860691-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6134M (3.2GHz/8-core/130W) FIO Processor Kit for HPE ProLiant DL360 Gen10 876087-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6134 (3.2GHz/8-core/130W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860689-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6132 (2.6GHz/14-core/140W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860681-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6130 (2.1GHz/16-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860687-L21

Intel Xeon-Gold 6128 (3.4GHz/6-core/115W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860685-L21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Gold 6126 (2.6GHz/12-core/125W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860683-L21

Intel Xeon-Gold 5122 (3.6GHz/4-core/105W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860679-L21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 5120 (2.2GHz/14-core/105W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860665-L21

Intel Xeon-Gold 5118 (2.3GHz/12-core/105W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860663-L21

Intel Xeon-Gold 5117 (2.0GHz/14-core/105W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P00793-L21

Intel Xeon-Gold 5115 (2.4GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 860661-L21

**2<sup>nd</sup> Generation Intel Xeon- Silver**

Intel Xeon-Silver 4216 (2.1GHz/16-core/100W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02583-L21

Intel Xeon-Silver 4215R (3.2GHz/8-core/130W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P24479-L21

**Notes:**

- Ships with Performance Heatsink.
- Only qualified on Network Choice (NC) Models.

Intel Xeon-Silver 4215 (2.5GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02598-L21

Intel Xeon-Silver 4214Y (2.2GHz/12-10-8-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02610-L21

**Notes:** 12/10/8 cores would result in 2.2/2.3/2.4 GHz operating points

Intel Xeon-Silver 4214R (2.4GHz/12-core/100W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P15977-L21

**Notes:** Only qualified on Network Choice (NC) Models.

Intel Xeon-Silver 4214 (2.2GHz/12-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02580-L21

Intel Xeon-Silver 4210R (2.4GHz/10-core/100W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P15974-L21

**Notes:** Only qualified on Network Choice (NC) Models.

Intel Xeon-Silver 4210 (2.2GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02574-L21

Intel Xeon-Silver 4208 (2.1GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10 P02571-L21



### Configuration Information

#### 1<sup>st</sup> Generation Intel Xeon-Silver

Intel Xeon-Silver 4116 (2.1GHz/12-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10	874449-L21
Intel Xeon-Silver 4114 (2.2GHz/10-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10	860657-L21
Intel Xeon-Silver 4112 (2.6GHz/4-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10	860659-L21
Intel Xeon-Silver 4110 (2.1GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10	860653-L21
Intel Xeon-Silver 4108 (1.8GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10	860655-L21

#### 2<sup>nd</sup> Generation Intel Xeon- Bronze

Intel Xeon-Bronze 3206R (1.9GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P15968-L21
--------------------------------------------------------------------------------------------	------------

**Notes:** Only qualified on Network Choice (NC) Models.

Intel Xeon-Bronze 3204 (1.9GHz/6-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10	P02565-L21
-------------------------------------------------------------------------------------------	------------

#### 1<sup>st</sup> Generation Intel Xeon-Bronze

Intel Xeon-Bronze 3106 (1.7GHz/8-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10	860651-L21
Intel Xeon-Bronze 3104 (1.7GHz/6-core/85W) FIO Processor Kit for HPE ProLiant DL360 Gen10	860649-L21

### Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go to:

<https://www.hpe.com/docs/memory-population-rules>

For Gen10 memory speed table, please go to: <https://www.hpe.com/docs/memory-speed-table>

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: <http://www.hpe.com/docs/memory-ras-feature>.

#### Notes:

- Maximum memory capacity and speed per processor is dependent on processor model selection or limitation.
- DDR4-2933 Memory Kits are only supported with 2<sup>nd</sup> Generation Intel Xeon Scalable Series Processors and DDR4-2666 Memory Kits are only supported with 1<sup>st</sup> Generation Intel Xeon Scalable Series Processors.

#### Registered DIMMs (RDIMMs) for 2<sup>nd</sup> Generation Intel Xeon Scalable Series

HPE 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00930-B21
HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00924-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00922-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00920-B21
HPE 8GB (1x8GB) Single Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00918-B21

#### Registered DIMMs (RDIMMs) for 1<sup>st</sup> Generation Intel Xeon Scalable Series

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	815100-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	815098-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	835955-B21
HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	815097-B21

#### Load Reduced DIMMs (LRDIMMs) for 2<sup>nd</sup> Generation Intel Xeon Scalable Series

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2933 CAS-24-21-21 Load Reduced 3DS Smart Memory Kit	P00928-B21
HPE 128GB (1x128GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit	P11040-B21
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit	P00926-B21

#### Load Reduced DIMMs (LRDIMMs) for 1<sup>nd</sup> Generation Intel Xeon Scalable Series

### Configuration Information

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Memory Kit	815102-B21
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit	815101-B21

#### HPE Persistent Memory

HPE 512GB 2666 Persistent Memory Kit featuring Intel Optane DC Persistent Memory	835810-B21
HPE 256GB 2666 Persistent Memory Kit featuring Intel Optane DC Persistent Memory	835807-B21
HPE 128GB 2666 Persistent Memory Kit featuring Intel Optane DC Persistent Memory	835804-B21

#### Notes:

- A maximum of 12 HPE Persistent Memory Kits supported on the following 2<sup>nd</sup> Generation Intel Xeon Scalable Processor series (Platinum 8200, Gold 6200, Gold 5200, Silver 4215 and 4215R)
- For additional information regarding HPE Persistent Memory Population Rules and Guidelines for Gen10 visit: <http://www.hpe.com/docs/memory-population-rules>

#### HPE Persistent Memory (NVDIMM)

HPE 16GB NVDIMM Single Rank x4 DDR4-2666 Module Kit	845264-B21
-----------------------------------------------------	------------

#### Notes:

- A maximum of 12 NVDIMMs supported with 1<sup>st</sup> Generation Intel Xeon Scalable Processors ONLY and can only be mixed with RDIMMs.
- For General Server Memory and NVDIMM Population Rules and Guidelines for Gen10 see details here:

<http://www.hpe.com/docs/memory-population-rules>

### Step 2c: Choose Power Supplies

Please select one or two power supplies from below.

**Notes:** Mixing of 2 different power supplies is NOT supported.

#### HPE Flex Slot Power Supplies

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865408-B21
HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21
HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21

**Notes:** 1600W Power supplies only support high line voltage (200 VAC to 240 VAC).

### Step 3: Choose Additional (FIO) Factory Integratable Options

Each of the following may be selected if desired at time of factory integration

HPE Trusted Platform Module 2.0 Gen10 Option	864279-B21
----------------------------------------------	------------

#### Notes:

- HPE Trusted Platform Module 2.0 option works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants.
- HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

HPE Gen10 TPM 1.2 FIO Setting	872108-B21
-------------------------------	------------

**Notes:** TPM 2.0 is set as default, for 1.2 TPM setting instead, please select this option.

HPE Legacy FIO Mode Setting	758959-B22
-----------------------------	------------

**Notes:** UEFI is the default, this FIO part can be used for CTO to enable Legacy mode.



### Configuration Information

---

#### **Step 4: Choose Additional Options for Factory Integration from Core and Additional Option sections below**

HPE OneView for ProLiant DL Server including 3yr 24x7 Support FIO Bundle Physical 1-server LTU

E5Y43A

HPE OneView w/o iLO including 3yr 24x7 Support 1-server FIO LTU

P8B31A

---

### Core Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

### HPE Unique Options

#### Risers

HPE DL360 Gen10 Low Profile Riser Kit	867982-B21
HPE DL360 Gen10 SATA M.2 2280 Riser Kit	867978-B21
HPE DL360 Gen10 2P FHFL GPU v2 Enablement Kit	P23271-B21

#### Notes:

Replaces 867980-B21. Enhanced to support additional GPUs and compatible with all GPUs qualified on DL360 Gen10.

This kit is not available on the 10 NVMe model.

Riser Information*								
Part number	Description	Riser position		Slot Bus width (Gen3 lanes)			NVMe Direct Connect	
		Primary	Secondary	#1	#2	#3	Connectors	Max SSDs
n/a	HPE DL360 Gen10 x16/x8 Primary GPU Riser	D	N	x16	x8	O	n/a	n/a
867978-B21	HPE DL360 Gen10 x16/x16 SATA M.2 2280 Riser Kit	O	N	x16	x16	O	n/a	n/a
P23271-B21	HPE DL360 Gen10 x16 FH GPU v2 Riser Kit	N	O	O	n/a <sup>4</sup>	x16	n/a	n/a
867980-B21 (Obsolete)	HPE DL360 Gen10 x16 FH GPU Riser Kit	N	O	O	n/a <sup>4</sup>	x16	n/a	n/a
867982-B21	HPE DL360 Gen10 x16 LP Riser Kit	N	O	O	O	x16	n/a	n/a
n/a	HPE DL360 Gen10 x16/x8 1-port 2SFF NVMe Riser <sup>1</sup>	O	N	x16	x8	O	1	2
n/a	HPE DL360 Gen10 5-port 10SFF NVMe Riser Kit <sup>2</sup>	N	D <sup>3</sup>	O	O	O	5	10
867972-B21	HPE DL360 Gen10 1SFF SAS/SATA Rear Backplane Kit	O	N	O	x8	O	n/a	n/a

### Core Options

#### Notes:

D = Default on chassis; O = Optional; N = not supported or slot/connector not present.

<sup>1</sup>Included on 2SFF NVMe Backplane Kit (871242-B21)

<sup>2</sup>Included on 10SFF chassis (867960-B21, 875967-B21, P19767-B21 & P19770-B21) or 10SFF Premium backplane kit (867974-B21)

<sup>3</sup>Included on 10SFF chassis (867960-B21, 875967-B21, P19767-B21 & P19770-B21)

<sup>4</sup>When secondary full height kit is installed, then primary PCIe Slot #2 cannot be used. Only 2 full height slots are supported.

\*For additional details on ProLiant DL Gen10 server risers.

please visit: <https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00043229enw>

### Performance Cooling Options

HPE DL360 Gen10 High Performance Heat Sink Kit	871246-B21
HPE DL360 Gen10 High Performance Fan Kit	871244-B21

### Universal Media Bay Options

HPE DL360 Gen10 2SFF SAS/SATA Backplane Kit	867966-B21
<b>Notes:</b> Not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations.	
HPE DL360 Gen10 2SFF NVMe Backplane Kit	871242-B21
<b>Notes:</b> Not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations.	
HPE DL360 Gen10 2SFF SATA UFF Backplane Kit	867970-B21
<b>Notes:</b> Not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations.	
HPE DL360 Gen10 8SFF Display Port/USB/Optical Drive Blank Kit	868000-B21
<b>Notes:</b> This kit is required for Optical Drive option (8SFF model only).	
HPE DL360 Gen10 LFF Display Port and USB Kit	868004-B21

### Optical Drive Options

HPE Mobile USB DVD-RW Optical Drive	701498-B21
<b>Notes:</b> This kit is supported on USB 3.0 ports only.	
HPE 9.5mm SATA DVD-ROM Optical Drive	726536-B21
HPE 9.5mm SATA DVD-RW Optical Drive	726537-B21

### System Insight Display Options

HPE DL360 Gen10 SFF System Insight Display Power Module Kit	867996-B21
HPE DL360 Gen10 LFF System Insight Display Power Module Kit	867994-B21

### Rear Drive Option Kit

HPE DL360 Gen10 1SFF Rear SAS/SATA/UFF Backplane Kit	867972-B21
------------------------------------------------------	------------

### Core Options

#### 10 NVMe chassis Upgrade Kit

HPE DL360 Gen10 10SFF Premium Backplane Kit 867974-B21

**Notes:** This kit is supported on the 8SFF model only.

### Security

HPE Trusted Platform Module 2.0 Gen10 Option 864279-B21

HPE DL360 Gen10 Chassis Intrusion Detection Kit 867984-B21

HPE 1U Gen10 Bezel Kit 867998-B21

HPE Bezel Lock Kit 875519-B21

### HPE Processors

Please select one -L21 processor required above.

For second processor, please select the same processor model with -B21 from Core Options - HPE Processors section below.

For example: first processor, select P02679-L21 then for second processor, select P02679-B21.

#### Notes:

Field upgrades from 1<sup>st</sup> generation processors (x1xx) to 2<sup>nd</sup> generation processors (x2xx) not supported.

Mixing of 2 different processor models is not supported.

For first processor, -L21 kit will include 5 fans. With the exception of Xeon-Gold 6256, Gold 6250L, Gold 6250, Gold 6212U, Gold 6210U, Gold 6209U & Gold 6208U processors, -B21 kits include 2 fans (for 4 LFF and 8 SFF CTO Server, 10 NVMe CTO Server always includes 7 High Performance fans).

Processors with 130W or higher will ship with the High Performance heat sink plus SKUs 8256, 5222, 8156, 6128, 5122 as noted below. All other processors will ship with the Standard heat sink.

When 2<sup>nd</sup> Generation Intel Xeon Scalable Processor is selected, then only DDR4-2933 Memory Kit can be selected; When 1<sup>st</sup> Generation Intel Xeon Scalable Processor is selected, then only DDR4-2666 Memory Kit can be selected

#### 2<sup>nd</sup> Generation Intel Xeon-Platinum

Intel Xeon-Platinum 8280 (2.7GHz/28-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 P02679-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8280L (2.7GHz/28-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 P02718-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8280M (2.7GHz/28-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 P02703-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8276 (2.2GHz/28-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 P02676-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8276L (2.2GHz/28-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 P02715-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8276M (2.2GHz/28-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 P02700-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8270 (2.7GHz/26-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 P02673-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8268 (2.9GHz/24-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 P02670-B21

## Core Options

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8260 (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 P02661-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8260L (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 P02712-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8260M (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 P02694-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8260Y (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 P02682-B21

**Notes:**

24/20/16 cores would result in 2.4/2.5/2.7 GHz operating points

Ships with High Performance Heatsink.

Intel Xeon-Platinum 8256 (3.8GHz/4-core/105W) Processor Kit for HPE ProLiant DL360 Gen10 P02655-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Platinum 8253 (2.2GHz/16-core/125W) Processor Kit for HPE ProLiant DL360 Gen10 P02652-B21

### 1<sup>st</sup> Generation Intel Xeon-Platinum

Intel Xeon-Platinum 8180M (2.5GHz/28-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 876099-B21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Platinum 8180 (2.5GHz/28-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 867988-B21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Platinum 8176 (2.1GHz/28-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 870982-B21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Platinum 8170 (2.1GHz/26-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 870980-B21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Platinum 8168 (2.7GHz/24-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 870978-B21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Platinum 8165 (2.3GHz/24-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 879121-B21

**Notes:**

Ships with Performance Heatsink.

Requires the High Performance Fan Kit (871244-B21) **Notes:** Supports "Core boosting"

Learn more <http://www.hpe.com/info/list>.

To enable this feature an iLO Advanced, or iLO Advanced Premium Security edition License are required.

Intel Xeon-Platinum 8164 (2.0GHz/26-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 870976-B21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Platinum 8160M (2.1GHz/24-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 876093-B21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Platinum 8160 (2.1GHz/24-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 870974-B21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Platinum 8158 (3.0GHz/12-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 874455-B21

**Notes:** Ships with Performance Heatsink.

Intel Xeon-Platinum 8153 (2.0GHz/16-core/125W) Processor Kit for HPE ProLiant DL360 Gen10 870972-B21

### 2<sup>nd</sup> Generation Intel Xeon-Gold

Intel Xeon-Gold 6262V (1.9GHz/24-core/135W) Processor Kit for HPE ProLiant DL360 Gen10 P11842-B21

## Core Options

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6258R (2.7GHz/28-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 P24488-B21

**Notes:**

Ships with High Performance Heatsink.  
Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 6256 (3.6GHz/12-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 P23744-B21

**Notes:**

Ships with High Performance Heatsink.  
Ambient temperature support up to 30C.  
High performance fans are required.

Intel Xeon-Gold 6254 (3.1GHz/18-core/200W) Processor Kit for HPE ProLiant DL360 Gen10 P02649-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6252 (2.1GHz/24-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 P02646-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6252N (2.3GHz/24-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 P11851-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6250L (3.9GHz/8-core/185W) Processor Kit for HPE ProLiant DL360 Gen10 P28257-B21

**Notes:**

Ships with High Performance Heatsink.  
NVMe SSDs not supported with this processor.  
Not supported on Premium 10SFF NVMe chassis.  
Ambient temperature support up to 25C on 4LFF and 8SFF configurations. 2SFF cages not supported.  
High performance fans are required.

**Intel Xeon-Gold 6250 (3.9GHz/8-core/185W) Processor Kit for HPE ProLiant DL360 Gen10** P23741-B21

**Notes:**

Ships with High Performance Heatsink.  
NVMe SSDs not supported with this processor.  
Not supported on Premium 10SFF NVMe chassis.  
Ambient temperature support up to 25C on 4LFF and 8SFF configurations. 2SFF cages not supported.  
High performance fans are required.

Intel Xeon-Gold 6248R (3.0GHz/24-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 P24487-B21

**Notes:**

Ships with High Performance Heatsink.  
Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 6248 (2.5GHz/20-core/150W) Processor Kit for HPE ProLiant DL360 Gen10 P02640-B21

**Notes:** Ships with High Performance Heatsink.

Intel Xeon-Gold 6246R (3.4GHz/16-core/205W) Processor Kit for HPE ProLiant DL360 Gen10 P24486-B21

**Notes:**

Ships with High Performance Heatsink.  
Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 6246 (3.3GHz/12-core/165W) Processor Kit for HPE ProLiant DL360 Gen10 P15443-B21

**Notes:** Ships with High Performance Heatsink.

## Core Options

Intel Xeon-Gold 6244 (3.6GHz/8-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P02634-B21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6242R (3.1GHz/20-core/205W) Processor Kit for HPE ProLiant DL360 Gen10	P24485-B21
<b>Notes:</b>	
Ships with High Performance Heatsink. Only qualified on Network Choice (NC) Models.	
Intel Xeon-Gold 6242 (2.8GHz/16-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P02628-B21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6240R (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL360 Gen10	P24484-B21
<b>Notes:</b>	
Ships with High Performance Heatsink. Only qualified on Network Choice (NC) Models.	
Intel Xeon-Gold 6240 (2.6GHz/18-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P02625-B21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6240Y (2.6GHz/18-14-8-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P02613-B21
<b>Notes:</b>	
18/14/8 cores would result in 2.6/2.8/3.1 GHz operating points Ships with High Performance Heatsink.	
Intel Xeon-Gold 6240L (2.6GHz/18-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P02643-B21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6240M (2.6GHz/18-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P02688-B21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6238R (2.2GHz/28-core/165W) Processor Kit for HPE ProLiant DL360 Gen10	P24483-B21
<b>Notes:</b>	
Ships with High Performance Heatsink. Only qualified on Network Choice (NC) Models.	
Intel Xeon-Gold 6238 (2.1GHz/22-core/140W) Processor Kit for HPE ProLiant DL360 Gen10	P02637-B21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6238L (2.1GHz/22-core/140W) Processor Kit for HPE ProLiant DL360 Gen10	P02658-B21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6238M (2.1GHz/22-core/140W) Processor Kit for HPE ProLiant DL360 Gen10	P02691-B21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6234 (3.3GHz/8-core/130W) Processor Kit for HPE ProLiant DL360 Gen10	P02604-B21
<b>Notes:</b> Ships with High Performance Heatsink.	
Intel Xeon-Gold 6230R (2.1GHz/26-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P24482-B21
<b>Notes:</b>	
Ships with High Performance Heatsink. Only qualified on Network Choice (NC) Models.	
Intel Xeon-Gold 6230 (2.1GHz/20-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	P02607-B21
Intel Xeon-Gold 6230N (2.3GHz/20-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	P11848-B21
Intel Xeon-Gold 6226R (2.9GHz/16-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P24481-B21



### Core Options

**Notes:**

Ships with High Performance Heatsink.  
Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 6226 (2.7GHz/12-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	P02601-B21
Intel Xeon-Gold 6222V (1.8GHz/20-core/115W) Processor Kit for HPE ProLiant DL360 Gen10	P11839-B21
Intel Xeon-Gold 6212U (2.4GHz/24-core/165W) Processor Kit for HPE ProLiant DL360 Gen10	P02667-B21

**Notes:**

Ships with High Performance Heatsink.  
Only supported in single socket configurations.

Intel Xeon-Gold 6210U (2.5GHz/20-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P02631-B21
----------------------------------------------------------------------------------------	------------

**Notes:**

Ships with High Performance Heatsink.  
Only supported in single socket configurations.

Intel Xeon-Gold 6209U (2.1GHz/20-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	P02622-B21
----------------------------------------------------------------------------------------	------------

**Notes:** Only supported in single socket configurations.

Intel Xeon-Gold 6208U (2.9GHz/16-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P24489-B21
----------------------------------------------------------------------------------------	------------

**Notes:**

– Ships with High Performance Heatsink.  
– Only supported in single socket configurations.

Intel Xeon-Gold 5222 (3.8GHz/4-core/105W) Processor Kit for HPE ProLiant DL360 Gen10.	P02709-B21
Intel Xeon-Gold 5220R (2.2GHz/24-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	P15995-B21

**Notes:**

– Ships with High Performance Heatsink.  
– Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 5220 (2.2GHz/18-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	P02595-B21
Intel Xeon-Gold 5220S (2.7GHz/18-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	P02577-B21
Intel Xeon-Gold 5218R (2.1GHz/20-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	P24480-B21

**Notes:** Only qualified on Network Choice (NC) Models.

Intel Xeon-Gold 5218 (2.3GHz/16-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	P02592-B21
Intel Xeon-Gold 5218N (2.3GHz/16-core/110W) Processor Kit for HPE ProLiant DL360 Gen10	P11845-B21
Intel Xeon-Gold 5218B (2.3GHz/16-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	P12516-B21

**Notes:** Consistent features with the 5218 processor but from a different die. Mixing both 5218B & 5218 in a system is not supported

Intel Xeon-Gold 5217 (3.0GHz/8-core/115W) Processor Kit for HPE ProLiant DL360 Gen10	P02589-B21
Intel Xeon-Gold 5215 (2.5GHz/10-core/85W) Processor Kit for HPE ProLiant DL360 Gen10	P02586-B21
Intel Xeon-Gold 5215L (2.5GHz/10-core/85W) Processor Kit for HPE ProLiant DL360 Gen10.	P02706-B21
Intel Xeon-Gold 5215M (2.5GHz/10-core/85W) Processor Kit for HPE ProLiant DL360 Gen10	P02568-B21

### 1<sup>st</sup> Generation Intel Xeon-Gold

Intel Xeon-Gold 6154 (3.0GHz/18-core/200W) Processor Kit for HPE ProLiant DL360 Gen10	870970-B21
---------------------------------------------------------------------------------------	------------

**Notes:** Ships with Performance Heatsink

Intel Xeon-Gold 6152 (2.1GHz/22-core/140W) Processor Kit for HPE ProLiant DL360 Gen10	860677-B21
---------------------------------------------------------------------------------------	------------

**Notes:** Ships with Performance Heatsink

## Core Options

Intel Xeon-Gold 6150 (2.7GHz/18-core/165W) Processor Kit for HPE ProLiant DL360 Gen10	860675-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6148 (2.4GHz/20-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	860673-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6146 (3.2GHz/12-core/165W) Processor Kit for HPE ProLiant DL360 Gen10	860671-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6144 (3.5GHz/8-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	870966-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6143 (2.8GHz/16-core/205W) Processor Kit for HPE ProLiant DL360 Gen10	879118-B21
<b>Notes:</b>	
– Ships with Performance Heatsink.	
– Requires the High Performance Fan Kit (871244-B21)	
– Supports "Core boosting" Learn more <a href="http://www.hpe.com/info/ist">http://www.hpe.com/info/ist</a> .	
– To enable this feature an iLO Advanced, or iLO Advanced Premium Security edition License are required.	
Intel Xeon-Gold 6142 (2.6GHz/16-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	860669-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6140 (2.3GHz/18-core/140W) Processor Kit for HPE ProLiant DL360 Gen10	860667-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6138 (2.0GHz/20-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	870968-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6136 (3.0GHz/12-core/150W) Processor Kit for HPE ProLiant DL360 Gen10	860691-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6134M (3.2GHz/8-core/130W) Processor Kit for HPE ProLiant DL360 Gen10	876087-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6134 (3.2GHz/8-core/130W) Processor Kit for HPE ProLiant DL360 Gen10	860689-B21
<b>Notes:</b> Ships with Performance Heatsink	
	860681-B21
Intel Xeon-Gold 6132 (2.6GHz/14-core/140W) Processor Kit for HPE ProLiant DL360 Gen10	
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6130 (2.1GHz/16-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	860687-B21
Intel Xeon-Gold 6128 (3.4GHz/6-core/115W) Processor Kit for HPE ProLiant DL360 Gen10	860685-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 6126 (2.6GHz/12-core/125W) Processor Kit for HPE ProLiant DL360 Gen10	860683-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 5122 (3.6GHz/4-core/105W) Processor Kit for HPE ProLiant DL360 Gen10	860679-B21
<b>Notes:</b> Ships with Performance Heatsink	
Intel Xeon-Gold 5120 (2.2GHz/14-core/105W) Processor Kit for HPE ProLiant DL360 Gen10	860665-B21
Intel Xeon-Gold 5118 (2.3GHz/12-core/105W) Processor Kit for HPE ProLiant DL360 Gen10	860663-B21
Intel Xeon-Gold 5117 (2.0GHz/14-core/105W) Processor Kit for HPE ProLiant DL360 Gen10	P00793-B21
Intel Xeon-Gold 5115 (2.4GHz/10-core/85W) Processor Kit for HPE ProLiant DL360 Gen10	860661-B21
<b>2<sup>nd</sup> Generation Intel Xeon-Silver</b>	
Intel Xeon-Silver 4216 (2.1GHz/16-core/100W) Processor Kit for HPE ProLiant DL360 Gen10	P02583-B21
Intel Xeon-Silver 4215R (3.2GHz/8-core/130W) Processor Kit for HPE ProLiant DL360 Gen10	P24479-B21

### Core Options

#### Notes:

- Ships with Performance Heatsink.
- Only qualified on Network Choice (NC) Models.

Intel Xeon-Silver 4215 (2.5GHz/8-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 P02598-B21

Intel Xeon-Silver 4214Y (2.2GHz/12-10-8-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 P02610-B21

**Notes:** 12/10/8 cores would result in 2.2/2.3/2.4 GHz operating points

Intel Xeon-Silver 4214R (2.4GHz/12-core/100W) Processor Kit for HPE ProLiant DL360 Gen10 P15977-B21

**Notes:** Only qualified on Network Choice (NC) Models.

Intel Xeon-Silver 4214 (2.2GHz/12-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 P02580-B21

Intel Xeon-Silver 4210R (2.4GHz/10-core/100W) Processor Kit for HPE ProLiant DL360 Gen10 P15974-B21

**Notes:** Only qualified on Network Choice (NC) Models.

Intel Xeon-Silver 4210 (2.2GHz/10-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 P02574-B21

Intel Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 P02571-B21

#### 1<sup>st</sup> Generation Intel Xeon-Silver

Intel Xeon-Silver 4116 (2.1GHz/12-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 874449-B21

Intel Xeon-Silver 4114 (2.2GHz/10-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 860657-B21

Intel Xeon-Silver 4112 (2.6GHz/4-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 860659-B21

Intel Xeon-Silver 4110 (2.1GHz/8-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 860653-B21

Intel Xeon-Silver 4108 (1.8GHz/8-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 860655-B21

#### 2<sup>nd</sup> Generation Intel Xeon- Bronze

Intel Xeon-Bronze 3206R (1.9GHz/8-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 P15968-B21

**Notes:** Only qualified on Network Choice (NC) Models.

Intel Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 P02565-B21

#### 1<sup>st</sup> Generation Intel Xeon-Bronze

Intel Xeon-Bronze 3106 (1.7GHz/8-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 860651-B21

Intel Xeon-Bronze 3104 (1.7GHz/6-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 860649-B21

### HPE Memory

For new Gen10 memory population rule whitepaper and optimal memory performance guidelines, please go to:

<https://www.hpe.com/docs/memory-population-rules>

For Gen10 memory speed table, please go to: <https://www.hpe.com/docs/memory-speed-table>

For memory Reliability, Accessibility, Serviceability (RAS) features whitepaper like Gen10 Fast Fault Tolerance and legacy mirrored memory feature etc. please go to: <http://www.hpe.com/docs/memory-ras-feature>

#### Notes:

- Maximum memory capacity and speed per processor is dependent on processor model selection or limitation.
- DDR4-2933 Memory Kits are only supported with 2nd Generation Intel Xeon Scalable Series Processors and DDR4-2666 Memory Kits are only supported with 1st Generation Intel Xeon Scalable Series Processors.

## Core Options

## HPE DDR4 Memory

**Registered DIMMs (RDIMMs) for 2<sup>nd</sup> Generation Intel Xeon Scalable Series**

HPE 64GB (1x64GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00930-B21
HPE 32GB (1x32GB) Dual Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00924-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00922-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00920-B21
HPE 8GB (1x8GB) Single Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit	P00918-B21

**Registered DIMMs (RDIMMs) for 1<sup>st</sup> Generation Intel Xeon Scalable Series**

HPE 32GB (1x32GB) Dual Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	815100-B21
HPE 16GB (1x16GB) Single Rank x4 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	815098-B21
HPE 16GB (1x16GB) Dual Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	835955-B21
HPE 8GB (1x8GB) Single Rank x8 DDR4-2666 CAS-19-19-19 Registered Smart Memory Kit	815097-B21

**Load Reduced DIMMs (LRDIMMs) for 2<sup>nd</sup> Generation Intel Xeon Scalable Series**

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2933 CAS-24-21-21 Load Reduced 3DS Smart Memory Kit	P00928-B21
HPE 128GB (1x128GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit	P11040-B21
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2933 CAS-21-21-21 Load Reduced Smart Memory Kit	P00926-B21

**Load Reduced DIMMs (LRDIMMs) for 1<sup>st</sup> Generation Intel Xeon Scalable Series**

HPE 128GB (1x128GB) Octal Rank x4 DDR4-2666 CAS-22-19-19 3DS Load Reduced Memory Kit	815102-B21
HPE 64GB (1x64GB) Quad Rank x4 DDR4-2666 CAS-19-19-19 Load Reduced Smart Memory Kit	815101-B21

**HPE Persistent Memory**

HPE 512GB 2666 Persistent Memory Kit featuring Intel Optane DC Persistent Memory	835810-B21
HPE 256GB 2666 Persistent Memory Kit featuring Intel Optane DC Persistent Memory	835807-B21
HPE 128GB 2666 Persistent Memory Kit featuring Intel Optane DC Persistent Memory	835804-B21

**Notes:**

- A maximum of 12 HPE Persistent Memory Kits supported on the following 2<sup>nd</sup> Generation Intel Xeon Scalable Processor series (Platinum 8200, Gold 6200, Gold 5200, Silver 4215 and 4215R)
- For additional information regarding HPE Persistent Memory Population Rules and Guidelines for Gen10 visit: <http://www.hpe.com/docs/memory-population-rules>

**HPE Persistent Memory (NVDIMM)**

HPE 16GB NVDIMM Single Rank x4 DDR4-2666 Module Kit	845264-B21
-----------------------------------------------------	------------

**Notes:**

- A maximum of 12 NVDIMMs supported with 1<sup>st</sup> Generation Intel Xeon Scalable Processors ONLY and can only be mixed with RDIMMs.
- For General Server Memory and NVDIMM Population Rules and Guidelines for Gen10 see details here: <http://www.hpe.com/docs/memory-population-rules>

**HPE Storage Controllers**

**Notes:** For additional details, please see HPE Smart Array Gen10 Controllers Data Sheet at:

<https://www.hpe.com/h20195/v2/Getdocument.aspx?docname=a00017196ENW>

### Core Options

#### HPE Flexible Smart Array Controllers

HPE Smart Array P816i-a SR Gen10 (16 Internal Lanes/4GB Cache/SmartCache) 12G SAS Modular Controller	804338-B21
HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular Controller	804331-B21
HPE Smart Array P816i-a SR Gen10 (16 Int Lanes/4GB Cache/SmartCache) 12G SAS Modular LH Controller	869083-B21
HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular LH Controller	869081-B21
HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular LH Controller	869079-B21
HPE Smart Array E208i-a SR Gen10 (8 Internal Lanes/No Cache) 12G SAS Modular Controller	804326-B21

**Notes:** The Low Height (LH) controller is required when a PCIe card that exceeds half-length is used in slots 2 or 3.

#### HPE Smart Array Controllers

HPE Smart Array P824i-p MR Gen10 (24 Internal Lanes/4GB Cache/CacheCade) 12G SAS PCIe Controller	870658-B21
--------------------------------------------------------------------------------------------------	------------

**Notes:**

–SFF only, not supported on LFF chassis.

Not supported on slot 3.

HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller	804405-B21
HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS PCIe Plug-in Controller	830824-B21

**Notes:** Not supported on slot 3.

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804398-B21
HPE Smart Array E208i-p SR Gen10 (8 Internal Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804394-B21

**Notes:** Not supported on slot 3.

HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit	P01366-B21
----------------------------------------------------------------	------------

**Notes:** Supports up to 6 P-class Smart Array controllers

HPE Smart Storage Hybrid Capacitor with 145mm Cable Kit	P02377-B21
---------------------------------------------------------	------------

**Notes:** Supports up to 3 P-class Smart Array controllers

#### Cable Kits

HPE DL360 Gen10 SFF Internal Cable Kit	867990-B21
HPE DL3XX Gen10 Rear Serial Cable and Enablement Kit	873770-B21

## Core Options

**HPE Hard Disk Drives**

For HDDs with optimal product availability, HPE advocates HDDs from the list located here:

**Enterprise - 12G SAS - SFF Drives**

HPE 2.4TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	881457-B21
HPE 1.8TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty 512e Digitally Signed Firmware HDD	872481-B21
HPE 1.2TB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872479-B21
HPE 900GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870759-B21
HPE 600GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870757-B21
HPE 600GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872477-B21
HPE 300GB SAS 12G Enterprise 15K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	870753-B21
HPE 300GB SAS 12G Enterprise 10K SFF (2.5in) SC 3yr Wty Digitally Signed Firmware HDD	872475-B21

**Midline - 12G SAS - SFF Drives**

HPE 2TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e HDD	765466-B21
HPE 1TB SAS 12G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	832514-B21

**Midline 6G SATA - SFF Drives**

HPE 2TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	765455-B21
HPE 1TB SATA 6G Midline 7.2K SFF (2.5in) SC 1yr Wty Digitally Signed Firmware HDD	655710-B21

**Enterprise - 12G SAS - LFF Drives**

HPE 600GB SAS 12G Enterprise 15K LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware HDD	P04695-B21
HPE 300GB SAS 12G Enterprise 15K LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware HDD	P04693-B21

**Midline - 12G SAS - LFF Drives**

HPE 16TB SAS 12G Business Critical 7.2K LFF (3.5in) SC 1yr Wty 512e ISE HDD	P23863-B21
HPE 14TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	P09153-B21
HPE 12TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	881779-B21
HPE 10TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	857644-B21
HPE 8TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	819201-B21
HPE 6TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861754-B21
HPE 4TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872487-B21
HPE 2TB SAS 12G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872485-B21

**Midline - 6G SATA - LFF Drives**

HPE 16TB SATA 6G Business Critical 7.2K LFF (3.5in) SC 1yr Wty 512e ISE HDD	P23857-B21
HPE 14TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	P09163-B21
HPE 12TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	881785-B21
HPE 10TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Helium 512e Digitally Signed Firmware HDD	857648-B21
HPE 8TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e Digitally Signed Firmware HDD	819203-B21
HPE 6TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty 512e HDD	861750-B21
HPE 4TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872491-B21
HPE 2TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty Digitally Signed Firmware HDD	872489-B21
HPE 1TB SATA 6G Midline 7.2K LFF (3.5in) SC 1yr Wty HDD	861691-B21

## Core Options

**HPE Solid State Drives**

For SSD selection guidance, please visit <https://ssd.hpe.com/>

For SSDs with optimal product availability, HPE advocates SSDs from the list located here:

**Read Intensive - 12G SAS - SFF - Solid State Drives**

HPE 15.3TB SAS 12G Read Intensive SFF SC SS540 SSD	P21147-B21
HPE 15.3TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06592-B21
HPE 15.36TB SAS 12G Read Intensive SFF SC PM1643a SSD	P19911-B21
HPE 7.68TB SAS 12G Read Intensive SFF SC SS540 SSD	P21145-B21
HPE 7.68TB SAS 12G Read Intensive SFF SC PM1643a SSD	P19909-B21
HPE 7.68TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06590-B21
HPE 7.68TB SAS 12G Read Intensive SFF SC PM5 SSD	P04523-B21
HPE 3.84TB SAS 12G Read Intensive SFF SC SS540 SSD	P21143-B21
HPE 3.84TB SAS 12G Read Intensive SFF SC PM1643a SSD	P19907-B21
HPE 3.84TB SAS 12G Read Intensive SFF SC PM5 SSD	P04521-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC SS540 SSD	P21141-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC PM1643a SSD	P19905-B21
HPE 1.92TB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06586-B21
HPE 1.92TB SAS 12G Read Intensive SFF SC PM5 SSD	P04519-B21
HPE 960GB SAS 12G Read Intensive SFF SC SS540 SSD	P21139-B21
HPE 960GB SAS 12G Read Intensive SFF SC PM1643a SSD	P19903-B21
HPE 960GB SAS 12G Read Intensive SFF SC PM5 SSD	P04517-B21
HPE 960GB SAS 12G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P06584-B21

**Mixed Use - 12G SAS - SFF - Solid State Drives**

HPE 6.4TB SAS 12G Mixed Use SFF SC SS540 SSD	P21137-B21
HPE 6.4TB SAS 12G Mixed Use SFF SC PM1645a SSD	P19919-B21
HPE 6.4TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P09096-B21
HPE 6.4TB SAS 12G Mixed Use SFF SC PM5 SSD	P04539-B21
HPE 3.2TB SAS 12G Mixed Use SFF SC SS540 SSD	P21135-B21
HPE 3.2TB SAS 12G Mixed Use SFF SC PM5 SSD	P04537-B21
HPE 3.2TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P09094-B21
HPE 1.6TB SAS 12G Mixed Use SFF SC SS540 SSD	P21133-B21
HPE 1.6TB SAS 12G Mixed Use SFF SC PM1645a SSD	P19915-B21
HPE 1.6TB SAS 12G Mixed Use SFF SC PM5 SSD	P04533-B21
HPE 1.6TB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P09092-B21
HPE 960GB SAS 12G Mixed Use SFF SC Value SAS RM5 SSD	P10448-B21
HPE 800GB SAS 12G Mixed Use SFF SC SS540 SSD	P21131-B21
HPE 800GB SAS 12G Mixed Use SFF SC PM1645a SSD	P19913-B21
HPE 800GB SAS 12G Mixed Use SFF SC PM5 SSD	P04527-B21
HPE 800GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P09090-B21
HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P04525-B21



## Core Options

HPE 400GB SAS 12G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD P09088-B21

**Write Intensive - 12G SAS - SFF - Solid State Drives**

HPE 3.2TB SAS 12G Write Intensive SFF SC PM5 SSD P04547-B21

HPE 1.6TB SAS 12G Write Intensive SFF SC SS540 SSD P21129-B21

HPE 1.6TB SAS 12G Write Intensive SFF SC PM5 SSD P04545-B21

HPE 800GB SAS 12G Write Intensive SFF SC SS540 SSD P21127-B21

HPE 800GB SAS 12G Write Intensive SFF SC PM5 SSD P04543-B21

HPE 400GB SAS 12G Write Intensive SFF SC SS540 SSD P21125-B21

HPE 400GB SAS 12G Write Intensive SFF SC PM5 SSD P04541-B21

**Read Intensive - 12G Value SAS - SFF - Solid State Drives**

HPE 7.68TB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD P10446-B21

HPE 3.84TB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD P10444-B21

HPE 1.92TB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD P10442-B21

HPE 960GB SAS 12G Read Intensive SFF SC Value SAS RM5 SSD P10440-B21

**Mixed Use - 12G Value SAS - SFF - Solid State Drives**

HPE 3.84TB SAS 12G Mixed Use SFF SC Value SAS RM5 SSD P10460-B21

HPE 1.92TB SAS 12G Mixed Use SFF SC Value SAS RM5 SSD P10454-B21

**Very Read Optimized - 6G SATA - SFF - Solid State Drives**

HPE 7.68TB SATA 6G Very Read Optimized SFF SC 5210 SSD P23493-B21

HPE 3.84TB SATA 6G Very Read Optimized SFF SC 5210 SSD P23489-B21

HPE 1.92TB SATA 6G Very Read Optimized SFF SC 5210 SSD P23487-B21

**Read Intensive - 6G SATA - SFF - Solid State Drives**

HPE 7.68TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor P18430-B21

HPE 7.68TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD P04482-B21

HPE 7.68TB SATA 6G Read Intensive SFF SC 5300P SSD P19945-B21

HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD P18428-B21

HPE 3.84TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD P04480-B21

HPE 3.84TB SATA 6G Read Intensive SFF SC PM883 SSD P04570-B21

HPE 3.84TB SATA 6G Read Intensive SFF SC S4510 SSD P05946-B21

HPE 3.84TB SATA 6G Read Intensive SFF SC 5300P SSD P19943-B21

HPE 3.84TB SATA 6G Read Intensive SFF SC SE4011 SSD P06200-B21

HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD P18426-B21

HPE 1.92TB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD P04478-B21

HPE 1.92TB SATA 6G Read Intensive SFF SC PM883 SSD P04566-B21

HPE 1.92TB SATA 6G Read Intensive SFF SC S4510 SSD P05938-B21

HPE 1.92TB SATA 6G Read Intensive SFF SC 5300P SSD P19941-B21

HPE 1.92TB SATA 6G Read Intensive SFF SC SE4011 SSD P06198-B21

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD P18424-B21

HPE 960GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD P04476-B21

HPE 960GB SATA 6G Read Intensive SFF SC PM883 SSD P04564-B21

HPE 960GB SATA 6G Read Intensive SFF SC S4510 SSD P05932-B21

HPE 960GB SATA 6G Read Intensive SFF SC 5300P SSD P19939-B21

### Core Options

HPE 960GB SATA 6G Read Intensive SFF SC SE4011 SSD	P06196-B21
HPE 480GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18422-B21
HPE 480GB SATA 6G Read Intensive SFF SC PM883 SSD	P04560-B21
HPE 480GB SATA 6G Read Intensive SFF SC S4510 SSD	P05928-B21
HPE 480GB SATA 6G Read Intensive SFF SC 5300P SSD	P19937-B21
HPE 480GB SATA 6G Read Intensive SFF SC SE4011 SSD	P06194-B21
HPE 240GB SATA 6G Read Intensive SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18420-B21
HPE 240GB SATA 6G Read Intensive SFF SC S4510 SSD	P05924-B21
HPE 240GB SATA 6G Read Intensive SFF SC PM883 SSD	P04556-B21
HPE 240GB SATA 6G Read Intensive SFF SC 5300P SSD	P19935-B21

### Mixed Use - 6G SATA - SFF - Solid State Drives

HPE 3.84TB SATA 6G Mixed Use SFF SC 5300M SSD	P19953-B21
HPE 3.84TB SATA 6G Mixed Use SFF SC S4610 SSD	P05994-B21
HPE 3.84TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18438-B21
HPE 3.84TB SATA 6G Mixed Use SFF SC SM883 SSD	P21517-B21
HPE 3.84TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P00896-B21
HPE 3.84TB SATA 6G Mixed Use SFF RW SE5031 SSD	P13664-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC 5300M SSD	P19951-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18436-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC SM883 SSD	P09722-B21
HPE 1.92TB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P07930-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC S4610 SSD	P05986-B21
HPE 1.92TB SATA 6G Mixed Use SFF SC SE5031 SSD	P13662-B21
HPE 960GB SATA 6G Mixed Use SFF SC 5300M SSD	P19949-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18434-B21
HPE 960GB SATA 6G Mixed Use SFF SC SM883 SSD	P09716-B21
HPE 960GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P07926-B21
HPE 960GB SATA 6G Mixed Use SFF SC S4610 SSD	P05980-B21
HPE 960GB SATA 6G Mixed Use SFF SC SE5031 SSD	P13660-B21
HPE 480GB SATA 6G Mixed Use SFF SC 5300M SSD	P19947-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Multi Vendor SSD	P18432-B21
HPE 480GB SATA 6G Mixed Use SFF SC SM883 SSD	P09712-B21
HPE 480GB SATA 6G Mixed Use SFF (2.5in) SC 3yr Wty Digitally Signed Firmware SSD	P07922-B21
HPE 480GB SATA 6G Mixed Use SFF SC S4610 SSD	P05976-B21
HPE 480GB SATA 6G Mixed Use SFF SC SE5031 SSD	P13658-B21

### Read Intensive - PCIe/NVMe - SFF - Solid State Drives

HPE 15.36TB NVMe High Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P22282-B21
HPE 15.36TB NVMe Mainstream Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20145-B21
HPE 15.36TB NVMe Gen3 High Performance Read Intensive SFF SCN U.2 CM5 SSD	P07198-B21
HPE 7.68TB NVMe High Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20021-B21
HPE 7.68TB NVMe High Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P22280-B21

## Core Options

HPE 7.68TB NVMe Mainstream Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20143-B21
HPE 7.68TB NVMe Gen3 Mainstream Performance Read Intensive SFF SCN U.2 PE6011 SSD	P13682-B21
HPE 7.68TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P07196-B21
HPE 7.68TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10218-B21
HPE 4TB NVMe Gen3 High Performance Read Intensive SFF SCN U.2 P4510 SSD	P13697-B21
HPE 3.84TB NVMe High Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20019-B21
HPE 3.84TB NVMe High Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P22278-B21
HPE 3.84TB NVMe Mainstream Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20141-B21
HPE 3.84TB NVMe Gen3 Mainstream Performance Read Intensive SFF SCN U.2 PE6011 SSD	P13680-B21
HPE 3.84TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10212-B21
HPE 3.84TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P07194-B21
HPE 3.84TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10216-B21
HPE 2TB NVMe Gen3 High Performance Read Intensive SFF SCN U.2 P4510 SSD	P13695-B21
HPE 1.92TB NVMe High Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20017-B21
HPE 1.92TB NVMe Mainstream Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20139-B21
HPE 1.92TB NVMe High Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P22276-B21
HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10214-B21
HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10210-B21
HPE 1.92TB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P07192-B21
HPE 960GB NVMe High Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P22331-B21
HPE 960GB NVMe High Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20015-B21
HPE 960GB NVMe Mainstream Performance Read Intensive SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P25944-B21
HPE 960GB NVMe Gen3 Mainstream Performance Read Intensive SFF SCN U.2 PE6011 SSD	P13676-B21
HPE 960GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10208-B21
HPE 960GB NVMe x4 Lanes Read Intensive SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P07190-B21

**Notes:** NVMe SSDs not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations.

### Mixed Use - PCIe/NVMe - SFF - Solid State Drives

HPE 12.8TB NVMe High Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P22274-B21
HPE 12.8TB NVMe Mainstream Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20209-B21
HPE 6.4TB NVMe High Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20100-B21
HPE 6.4TB NVMe Mainstream Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20207-B21
HPE 6.4TB NVMe High Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P22272-B21
HPE 6.4TB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD	P13674-B21
HPE 6.4TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P07185-B21
HPE 6.4TB NVMe Gen3 High Performance Mixed Use SFF SCN U.2 P4610 SSD	P13703-B21
HPE 6.4TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10226-B21
HPE 3.2TB NVMe High Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20098-B21
HPE 3.2TB NVMe Mainstream Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20205-B21
HPE 3.2TB NVMe High Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P22270-B21
HPE 3.2TB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD	P13672-B21

## Core Options

HPE 3.2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P07183-B21
HPE 3.2TB NVMe Gen3 High Performance Mixed Use SFF SCN U.2 P4610 SSD	P13701-B21
HPE 3.2TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10224-B21
HPE 1.6TB NVMe High Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20096-B21
HPE 1.6TB NVMe Mainstream Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20203-B21
HPE 1.6TB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD	P13670-B21
HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P07181-B21
HPE 1.6TB NVMe High Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P22268-B21
HPE 1.6TB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P10222-B21
HPE 1.6TB NVMe Gen3 High Performance Mixed Use SFF SCN U.2 P4610 SSD	P13699-B21
HPE 800GB NVMe High Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P20094-B21
HPE 800GB NVMe Mainstream Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P25953-B21
HPE 800GB NVMe Gen3 Mainstream Performance Mixed Use SFF SCN U.2 PE6031 SSD	P13668-B21
HPE 800GB NVMe High Performance Mixed Use SFF (2.5in) SCN 3yr Wty Universal Connect SSD	P22329-B21
HPE 800GB NVMe x4 Lanes Mixed Use SFF (2.5in) SCN 3yr Wty Digitally Signed Firmware SSD	P07179-B21

**Notes:** NVMe SSDs not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations.

**Write Intensive- PCIe/NVMe - SFF - Solid State Drives**

HPE 750GB NVMe Gen3 High Performance Low Latency Write Intensive SFF SCN U.2 P4800X SSD	P06952-B21
HPE 375GB NVMe Gen3 High Performance Low Latency Write Intensive SFF SCN U.2 P4800X SSD	878014-B21

**Notes:** NVMe SSDs not supported on Xeon-Gold 6250L or Gold 6250 processor based configurations.

**Read Intensive - 6G SATA - M.2 UFF to SFF - Solid State Drives**

HPE Dual 480GB SATA 6G Read Intensive M.2 to SFF SCM 5300B SSD Kit	P19896-B21
HPE Dual 240GB SATA 6G Read Intensive M.2 to SFF SCM 5300B SSD Kit	P19894-B21

**Notes:** SCM dual drive functionality only supported on HPE DL360 Gen10 1SFF SAS/SATA Rear Backplane (867972-B21) or HPE DL360 Gen10 2SFF SATA UFF Backplane Kit (867970-B21). Installation on any other bay will only show one M.2 drive per bay.

**Mixed Use - 6G SATA - M.2 UFF to SFF - Solid State Drives**

HPE Dual 480GB SATA 6G Read Intensive M.2 - UFF to SFF SCM 3yr Wty Digitally Signed Firmware SSD	P06609-B21
HPE Dual 240GB SATA 6G Mixed Use M.2 - UFF to SFF SCM 3yr Wty Digitally Signed Firmware SSD	P06607-B21

**Notes:** SCM dual drive functionality only supported on HPE DL360 Gen10 1SFF SAS/SATA Rear Backplane (867972-B21) or HPE DL360 Gen10 2SFF SATA UFF Backplane Kit (867970-B21). Installation on any other bay will only show one M.2 drive per bay.

**Read Intensive - 6G SATA - M.2 - Solid State Media (2280 type)**

HPE 960GB SATA 6G Read Intensive M.2 2280 5300B SSD	P19892-B21
HPE 960GB SATA 6G Read Intensive M.2 2280 3yr Wty Digitally Signed Firmware SSD	875500-B21
HPE 480GB SATA 6G Read Intensive M.2 2280 5300B SSD	P19890-B21
HPE 240GB SATA 6G Read Intensive M.2 2280 5300B SSD	P19888-B21

**Mixed Use - 6G SATA - M.2 - Solid State Media (2280 type)**

HPE 960GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD	875492-B21
HPE 480GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD	875490-B21
HPE 240GB SATA 6G Mixed Use M.2 2280 3yr Wty Digitally Signed Firmware SSD	875488-B21

### Core Options

#### Internal - 6G SATA - Dual M.2 Enabling Kits

HPE Universal SATA 6G AIC HHHL M.2 SSD Enablement Kit 878783-B21

**Notes:** The Universal SATA M.2 Kit above will require a PCIe slot and support up to two of the same M.2 media cards.

HPE DL360 Gen10 SATA M.2 2280 Riser Kit 867978-B21

**Notes:** The DL360 SATA M.2 Riser Kit above is part of the Primary Riser so it will not take up a PCIe slot and will support up to two of the same 2280 M.2 media cards.

#### Mixed Use - 12G Value SAS - LFF - Solid State Drives

HPE 1.92TB SAS 12G Mixed Use LFF SCC Value SAS RM5 SSD P10456-B21

HPE 960GB SAS 12G Mixed Use LFF SCC Value SAS RM5 SSD P10450-B21

HPE 800GB SAS 12G Mixed Use LFF SCC PM5 SSD P04529-B21

#### Read Intensive - 6G SATA - LFF - Solid State Drives

HPE 1.92TB SATA 6G Read Intensive LFF SCC PM883 SSD P09693-B21

HPE 960GB SATA 6G Read Intensive LFF SCC PM883 SSD P09689-B21

#### Mixed Use - 6G SATA - LFF - Solid State Drives

HPE 1.92TB SATA 6G Mixed Use LFF SCC 5300M SSD P19982-B21

HPE 1.92TB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD P07932-B21

HPE 1.92TB SATA 6G Mixed Use LFF SCC SM883 SSD P09724-B21

HPE 960GB SATA 6G Mixed Use LFF SCC SM883 SSD P09718-B21

HPE 960GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD P07928-B21

HPE 480GB SATA 6G Mixed Use LFF SCC 5300M SSD P19978-B21

HPE 480GB SATA 6G Mixed Use LFF (3.5in) SCC 3yr Wty Digitally Signed Firmware SSD P07924-B21

#### Hard Drive Blank Kits

HPE Large Form Factor Hard Drive Blank Kit 666986-B21

HPE Small Form Factor Hard Drive Blank Kit 666987-B21

### HPE Smart IO

#### Pensando Distributed Services Card (DSC)

Pensando Distributed Services Platform DSC-25 10/25Gb 2-port SFP28 Card P26966-B21

#### Notes:

- Must be installed in slot 1 when used in combination with FlexibleLOM Module for iLO Management
- Each card instance requires one RTU license of Silver or Platinum software. In case of more than one adapter, RTU licenses doesn't need to be of the same part number.

Pensando Distributed Services Platform for HPE iLO Sideband Management Adaptive LOM Module P26969-B21

#### Pensando DSP Silver Software Licenses

Pensando Distributed Services Platform Silver 1yr Subscription 24x7 Support E-RTU R6A06AAE

Pensando Distributed Services Platform Silver 3yr Subscription 24x7 Support E-RTU R6A07AAE

## Core Options

Pensando Distributed Services Platform Silver 4yr Subscription 24x7 Support E-RTU	R6F68AAE
Pensando Distributed Services Platform Silver 5yr Subscription 24x7 Support E-RTU	R6A08AAE
<b>Pensando DSP Platinum Software Licenses</b>	
Pensando Distributed Services Platform Platinum 1yr Renewal Subscription 24x7 Support E-RTU	R6A09AAE
Pensando Distributed Services Platform Platinum 3yr Subscription 24x7 Support E-RTU	R6A10AAE
Pensando Distributed Services Platform Platinum 4yr Subscription 24x7 Support E-RTU	R6F69AAE
Pensando Distributed Services Platform Platinum 5yr Subscription 24x7 Support E-RTU	R6A11AAE

---

## HPE Networking

**100 Gigabit Ethernet adapters**

HPE Ethernet 100Gb 1-port QSFP28 CX556A Adapter	874253-B21
-------------------------------------------------	------------

**25 Gigabit Ethernet adapters**

HPE Ethernet 10/25Gb 2-port SFP28 CX4121B Adapter	817753-B21
---------------------------------------------------	------------

**Notes:** [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)

HPE Ethernet 10/25Gb 2-port SFP28 BCM57414 Adapter	817718-B21
----------------------------------------------------	------------

**Notes:**

– [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)

– PXE boot not supported on Legacy Mode

HPE Ethernet 10/25Gb 2-port SFP28 QL41401-A2G Adapter	867328-B21
-------------------------------------------------------	------------

**Notes:** [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)

**10 Gigabit Ethernet adapters**

HPE Ethernet 10Gb 2-port SFP+ BCM57414 Adapter	P08421-B21
------------------------------------------------	------------

HPE Ethernet 10Gb 2-port BASE-T X550-AT2 Adapter	817738-B21
--------------------------------------------------	------------

**Notes:** [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)

HPE Ethernet 10Gb 2-port SFP+ X710-DA2 Adapter	727055-B21
------------------------------------------------	------------

**Notes:** [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)

HPE Ethernet 10Gb 2-port 548SFP+ Adapter	P11338-B21
------------------------------------------	------------

**Notes:** [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)

HPE Ethernet 10Gb 2-port BASE-T BCM57416 Adapter	813661-B21
--------------------------------------------------	------------

**Notes:** [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)

HPE Ethernet 10Gb 2-port SFP+ 57810S Adapter	652503-B21
----------------------------------------------	------------

**Notes:** [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)

HPE Ethernet 10Gb 2-port SFP+ QL41401-A2G Adapter	P08446-B21
---------------------------------------------------	------------

**Notes:**

– [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)

– PXE boot not supported on Legacy Mode

HPE Ethernet 10Gb 2-port BASE-T 57810S Adapter	656596-B21
------------------------------------------------	------------

**Notes:** [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)

HPE Ethernet 10Gb 2-port BASE-T QL41401-A2G Adapter	867707-B21
-----------------------------------------------------	------------

**Notes:** [Alternative to FlexLOM requirement on Network Choice \(NC\) chassis](#)



## Core Options

**1 Gigabit Ethernet adapters**

HPE Ethernet 1Gb 4-port BASE-T I350-T4V2 Adapter	811546-B21
HPE Ethernet 1Gb 4-port BASE-T BCM5719 Adapter	647594-B21
HPE Ethernet 1Gb 2-port BASE-T I350-T2V2 Adapter	652497-B21
HPE Ethernet 1Gb 2-port BASE-T BCM5720 Adapter	615732-B21

**FlexibleLOM Adapters**

HPE Ethernet 10/25Gb 2-port FLR-SFP28 CX4 Adapter	817749-B21
HPE Ethernet 10/25Gb 2-port FLR-SFP28 BCM57414 Adapter	817709-B21
HPE Ethernet 10/25Gb 2-port FLR-SFP28 QL41401-A2G Converged Network Adapter	867334-B21
HPE Ethernet 10Gb 2-port FLR-SFP+ BCM57414 Adapter	P08440-B21
HPE Ethernet 10Gb 2-port FLR-SFP+ X710-DA2 Adapter	727054-B21
HPE Ethernet 10Gb 2-port FLR-T X550-AT2 Adapter	817745-B21
HPE FlexFabric 10Gb 4-port FLR-T 57840S Adapter	764302-B21
HPE Ethernet 10Gb 2-port FLR-T BCM57416 Adapter	817721-B21
HPE FlexFabric 10Gb 2-port FLR-SFP+ 57810S Adapter	700751-B21
HPE FlexFabric 10Gb 2-port FLR-T 57810S Adapter	700759-B21
HPE Ethernet 1Gb 4-port FLR-SFP+ BCM5719 Adapter	629135-B22
HPE Ethernet 1Gb 4-port FLR-T I350-T4V2 Adapter	665240-B21

**HPE InfiniBand**

HPE InfiniBand HDR/Ethernet 200Gb 1-port QSFP56 PCIe3 x16 MCX653105A-HDAT Adapter	P06154-B21
<b>Notes:</b> Must be paired with <a href="#">HPE IB HDR PCIe G3 Aux Card W/ Cbl (P06154-B23)</a>	
HPE InfiniBand HDR PCIe3 Auxiliary Card with 350mm Cable Kit	P06154-B23
HPE InfiniBand EDR/Ethernet 100Gb 2-port 841QSFP28 Adapter	872726-B21
HPE InfiniBand HDR100/Ethernet 100Gb 2-port QSFP56 PCIe3 x16 MCX653106A-ECAT Adapter	P06251-B21
HPE InfiniBand HDR100/Ethernet 100Gb 1-port QSFP56 PCIe3 x16 MCX653105A-ECAT Adapter	P06250-B21
HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+FLR-QSFP Adapter	764285-B21
HPE InfiniBand FDR/Ethernet 10Gb/40Gb 2-port 544+QSFP Adapter	764284-B21
HPE InfiniBand FDR/Ethernet 40/50Gb 2-port 547FLR-QSFP Adapter	879482-B21
HPE InfiniBand EDR 100Gb 1-port 841QSFP28 Adapter	872725-B21
HPE InfiniBand EDR/Ethernet 100Gb 1-port 840QSFP28 Adapter	825110-B21
HPE InfiniBand EDR/Ethernet 100Gb 2-port 840QSFP28 Adapter	825111-B21
HPE 100Gb 1-port OP101 QSFP28 x16 PCIe Gen3 with Intel Omni-Path Architecture Adapter	829335-B21

**Notes:** For additional InfiniBand information: <https://www.hpe.com/h20195/v2/GetHTML.aspx?docname=c04154440>.

**HPE Power Supplies**

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen10 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.



### Core Options

All pre-configured servers ship with a standard 6-foot IEC C-13/C-14 jumper cord (A0K02A). This jumper cord is also included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page.

To review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

#### HPE Flex Slot Platinum Hot-plug Power supplies

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	830272-B21
<b>Notes:</b> 1600W Power supplies only support high line voltage (200 VAC to 240 VAC).	
HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865414-B21
HPE 800W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit	865438-B21
HPE 800W Flex Slot -48VDC Hot Plug Low Halogen Power Supply Kit	865434-B21
HPE 800W Flex Slot Universal Hot Plug Low Halogen Power Supply Kit	865428-B21
HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	865408-B21

---

#### HPE Computation and Graphics Accelerators

Intel Arria 10 GX FPGA Accelerator for HPE	Q9B37C
NVIDIA Tesla T4 16GB Computational Accelerator for HPE	R0W29C
<b>Notes:</b> Requires High Performance Fan kit (871244-B21)	
NVIDIA Quadro RTX 4000 Graphics Accelerator for HPE	R1F95C
<b>Notes:</b> v2 GPU cable / enablement kit required	
NVIDIA Quadro P2200 Graphics Accelerator for HPE	R2U55C
<b>Notes:</b> If any of these accelerators is intended for slot 3 and configured with an AROC, the latter needs to have a low profile heatsink	
HPE DL360 Gen10 GPU CPU1 v2 Cable Kit	P23272-B21
<b>Notes:</b> Replaces 871248-B21. Enhanced to support additional GPUs and compatible with all GPUs qualified on DL360 Gen10.	

---

### Core Options

#### GPGPU Information

HPE DL360 Configuration										
Part number	Card	Qty supp.	Processor supported	PCIe speed	4LFF	8SFF	8+2SFF SAS/ SATA/ Dual M.2 <sup>1</sup>	8+2SFF SAS/ SATA/ Dual M.2 <sup>2</sup>	8+2SFF NVMe <sup>3</sup>	10SFF Premium <sup>4</sup>
Q9B37C	Intel Arria 10GX FPGA Accelerator	2	1 <sup>st</sup> & 2 <sup>nd</sup> Gen	Gen3	35C	35C	<25C	<30C	<30C	<30C
R2U55C	NVIDIA Quadro P2200 GPU Module	2	2 <sup>nd</sup> Gen	Gen3	35C	35C	35C	35C	35C	35C
Q0V77A (Obsolete)	NVIDIA Quadro P2000 GPU Module	2	1 <sup>st</sup> & 2 <sup>nd</sup> Gen	Gen3	35C	35C	35C	35C	35C	35C
R1F95C	NVIDIA Quadro RTX4000 GPU Module	2	2 <sup>nd</sup> Gen	Gen3	35C	35C	25C/30C*	30C/35C*	25C/30C*	35C <sup>5</sup>
Q0V78A (Obsolete)	NVIDIA Quadro P4000 GPU Module	2	1 <sup>st</sup> & 2 <sup>nd</sup> Gen	Gen3	35C	35C	35C	35C	35C	35C
R0W29C	NVIDIA Tesla T4 16GB Module	2	1 <sup>st</sup> & 2 <sup>nd</sup> Gen	Gen3	30C	30C	Not Supported	20C	20C	20C

#### Notes:

- The 2nd digit of the processor model number "x1xx" and "x2xx" is used to denote the processor generation (i.e. 1=1st generation and 2=2nd generation)
- When NVMe drives are installed you will be limited to Slot 1 only for any Accelerator module.
- Requires increased cooling to be selected in BIOS settings
- 1 - With standard system fans
- 2 - With High Performance system fans
- 3 - Requires high performance fans with 2SFF NVMe configuration.
- 4 - Requires high performance fans (Note these ship standard on 10SFF models).
- 5 - Limited to 1 GPU
- There is no Energy Star certification with Graphic cards.

## Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

### Embedded Management

#### HPE iLO Advanced

HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features	512485-B21
HPE iLO Advanced Flexible Quantity License with 1yr Support on iLO Licensed Features	512486-B21
HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features	512487-B21
HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features	BD505A
HPE iLO Advanced Flexible Quantity License with 3yr Support on iLO Licensed Features	BD506A
HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features	BD507A
HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features	E6U59ABE
HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features	E6U64ABE

---

#### HPE iLO Common Password Setting

HPE iLO Common Password FIO Setting	P08040-B21
-------------------------------------	------------

##### Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
  - Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services
- 

## HPE Converged Infrastructure Management Software

#### HPE OneView Advanced (with HPE iLO Advanced)

HPE OneView including 3yr 24x7 Support Physical 1-server LTU	E5Y34A
HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU	E5Y35AAE

#### HPE OneView Advanced (without HPE iLO Advanced)

HPE OneView w/o iLO including 3yr 24x7 Support 1-server LTU	P8B24A
HPE OneView w/o iLO including 3yr 24x7 Support Track 1-server LTU	P8B25A
HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU	P8B26AAE
HPE OneView Physical Media Kit LTU	E5Y37A

##### Notes:

- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>
- Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.
- Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be downloaded at: <https://www.hpe.com/us/en/integrated-systems/software.html>

## Additional Options

**HPE PCIe Workload Accelerator Options**

HPE 6.4TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card	P26938-B21
HPE 6.4TB NVMe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card	P10268-B21
HPE 3.2TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card	P26936-B21
HPE 3.2TB NVMe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card	P10266-B21
HPE 1.6TB PCIe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card	P26934-B21
HPE 1.6TB NVMe x8 Lanes Mixed Use HHHL 3yr Wty Digitally Signed Firmware Card	P10264-B21
HPE 750GB NVMe Gen3 x4 High Performance Low Latency Write Intensive AIC HHHL P4800X SSD	878038-B21

**Notes:** Please see the [HPE PCIe Workload Accelerators for ProLiant Servers QuickSpecs](#) for Technical Specifications and additional information.

**HPE Security**

HPE 1U Gen10 Bezel Kit	867998-B21
HPE Bezel Lock Kit	875519-B21
HPE DL360 Gen10 Chassis Intrusion Detection Kit	867984-B21

**Notes:** This provides a physical connection from the chassis board and hood and detects any physical intrusion into the chassis, providing security during the entire supply chain process of shipping, receiving, distribution, and operation.

HPE Trusted Platform Module 2.0 Gen10 Option	864279-B21
----------------------------------------------	------------

**Notes:**

- HPE Trusted Platform Module 2.0 option works with Gen10 servers with UEFI Mode not Legacy Mode. It is not compatible with HPE ProLiant Gen8 servers or earlier generation variants.
- HPE server systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

HPE Gen10 TPM 1.2 FIO Setting	872108-B21
-------------------------------	------------

**Notes:** This is a FIO setting to allows the TPM 2.0 module to operate in a TPM 1.2 mode

**HPE Storage Options****Emulex Fibre Channel HBAs**

HPE SN1200E 16Gb Single Port Fibre Channel Host Bus Adapter	Q0L13A
HPE SN1200E 16Gb Dual Port Fibre Channel Host Bus Adapter	Q0L14A
HPE SN1600E 32Gb Single Port Fibre Channel Host Bus Adapter	Q0L11A
HPE SN1600E 32Gb Dual Port Fibre Channel Host Bus Adapter	Q0L12A

**QLogic Fibre Channel HBAs**

HPE SN1100Q 16Gb Single Port Fibre Channel Host Bus Adapter	P9D93A
HPE SN1100Q 16Gb Dual Port Fibre Channel Host Bus Adapter	P9D94A
HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter	R2E08A
HPE SN1600Q 32Gb Single Port Fibre Channel Host Bus Adapter	P9M75A

### Additional Options

HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter	R2E09A
HPE SN1600Q 32Gb Dual Port Fibre Channel Host Bus Adapter	P9M76A
HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter	R2J62A
HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter	R2J63A

### Converged Network Adapter

HPE CN1300R 10/25Gb Dual Port Converged Network Adapter	Q0F09A
HPE CN1200R 10GBASE-T Converged Network Adapter	Q0F26A
HPE CN1100R Dual Port Converged Network Adapter	QW990A
HPE CN1100R 10GBASE-T Dual Port Converged Network Adapter	N3U52A
HPE CN1200E 10Gb Converged Network Adapter	E7Y06A
HPE CN1200E 10GBASE-T Dual Port Converged Network Adapter	N3U51A

### HPE Rack Options

#### Rail Kits

HPE 1U Gen10 SFF Easy Install Rail Kit	874543-B21
HPE 1U LFF Gen9 Easy Install Rail Kit	789388-B21
HPE 1U Cable Management Arm for Rail Kit	734811-B21

**Notes:** Supports both the Easy Install and Ball Bearing Rail Kits.

HPE 1U Gen10 SFF Ball Bearing Rail Kit	872252-B21
HPE 1U Gen10 LFF Ball Bearing Rail Kit	879003-B21

#### Notes:

- HPE rail kits contain telescoping rails which allow for in-rack serviceability.
- Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.

### HPE Racks

Please see the [HPE Advanced Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

Please see the [HPE Enterprise Series Racks QuickSpecs](#) for information on additional racks options and rack specifications.

### HPE Power Distribution Units (PDUs)

Please see the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

Please see the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications. Please see the [HPE Intelligent Power Distribution Unit \(PDU\) QuickSpecs](#) for information on these products and their specifications.

Please see the [HPE Metered and Switched Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.

### Additional Options

---

#### HPE Uninterruptible Power Systems (UPS)

To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\)](#) web page.

Please see the [HPE DirectFlow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.

Please see the [HPE Line Interactive Single Phase UPS QuickSpecs](#) for information on these products and their specifications.

---

#### HPE USB and SD Options

##### HPE Enterprise Mainstream Flash Media Kits for Memory Cards

HPE 32GB microSD RAID 1 USB Boot Drive	P21868-B21
HPE 32GB microSD Flash Memory Card	700139-B21
HPE 8GB microSD Flash Memory Card	726116-B21
HPE 8GB microSD Flash USB Drive	737953-B21
HPE 8GB Dual microSD Flash USB Drive	741279-B21

---

#### HPE Support Services

##### Installation & Start-up Services

HPE Install ProLiant DL3xx Service	U4506E
HPE Installation and Startup DL3xx Service	U4507E

##### Proactive Care


HPE 3 Year Proactive Care 24x7 DL360 Gen10 Service	H8QF3E
HPE 3 Year Proactive Care 24x7 with DMR DL360 Gen10 Service	H8QF4E
HPE 3 Year Proactive Care 24x7 with CDMR DL360 Gen10 Service	H8QF5E
HPE 3 Year Proactive Care Call-To-Repair DL360 Gen10 Service	H8QG2E
HPE 3 Year Proactive Care Call-To-Repair 24x7 with DMR DL360 Gen10 Service	H8QG3E
HPE 3 Year Proactive Care Call-To-Repair with CDMR DL360 Gen10 Service	H8QG4E

**Notes:** For a full listing of support services available for this server, please visit <https://ssc.hpe.com/>

---

### Memory

#### Memory Population guidelines

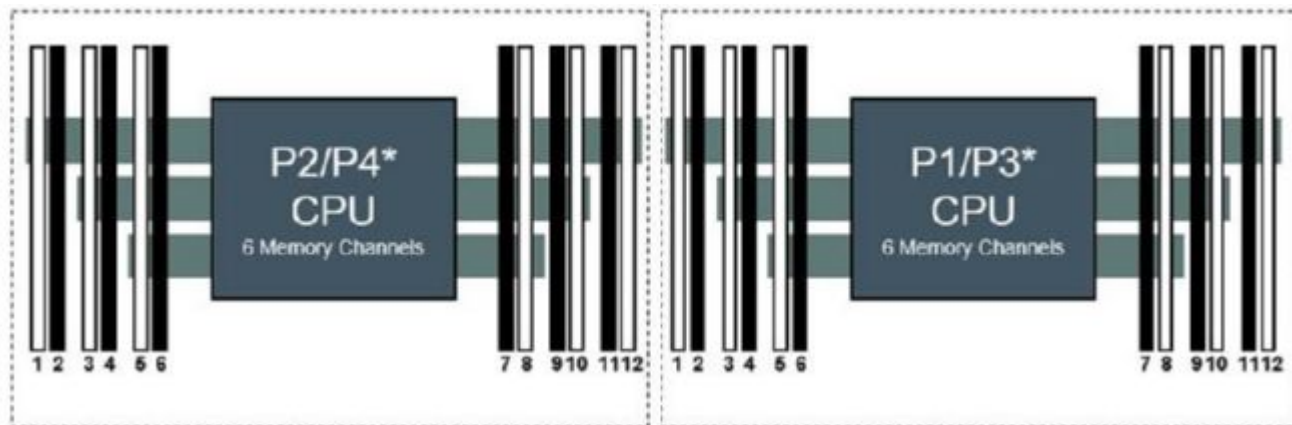

HPE Gen10 DL360 / DL380 / DL560

Notes:\* Servers Front Server2 Slots per Channel

1 DIMM								8				
2 DIMM s								8		10		
3 DIMM s								8		10		12
4 DIMM s			3		5			8		10		
5 DIMM s			3		5			8		10		12
6 DIMM s	1		3		5			8		10		12
7 DIMM s	1		3		5		7	8		10		12
8 DIMM s			3	4	5	6	7	8	9	10		
9 DIMM s	1		3		5		7	8	9	10	11	12
10 DIMM s	1		3	4	5	6	7	8	9	10		12
11 DIMM s	1		3	4	5	6	7	8	9	10	11	12
12 DIMM s	1	2	3	4	5	6	7	8	9	10	11	12

HPE ProLiant Gen10 12 slot per CPU DIMM population order

#### General Memory Population Rules and Guidelines:

- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.
- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit:



## Memory


- <http://www.hpe.com/docs/memory-population-rules>
- To realize the performance memory capabilities listed in this document, HPE DDR4 SmartMemory is required. For additional information, please see the [HPE DDR4 SmartMemory QuickSpecs](#).

**Notes:** The maximum memory speed is a function of the memory type, memory configuration, and processor model

For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>

---

## Storage

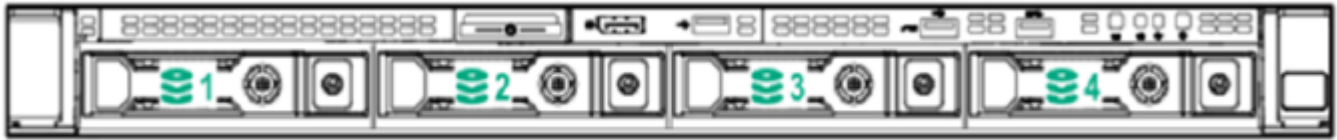

4 LFF device bay numbering




8 SFF + ODD device bay numbering




8 SFF + 2 SFF device bay numbering

Item	Description
1	Bays 1-8
2	Bays 1 and 2

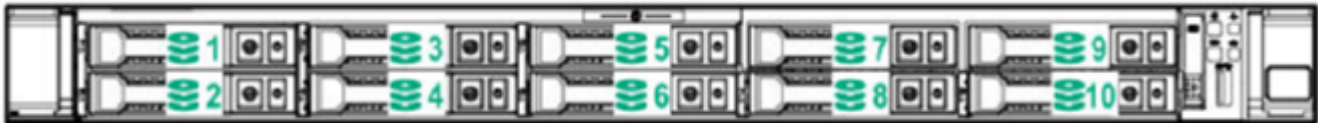

10 SFF NVMe/SAS backplane option device bay numbering

**Notes:** When the 10SFF NVMe/SAS backplane option is installed, bays 9 and 10 ONLY support NVMe Drives. The other bays support a mix of NVMe and SAS drives

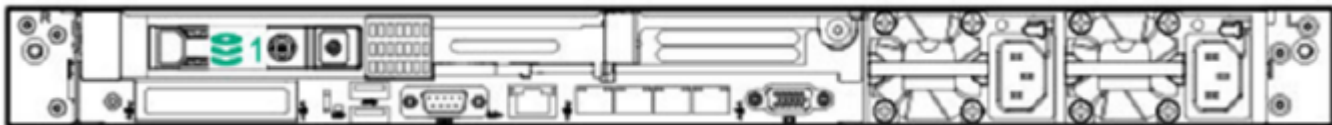

Optional rear device bay numbering

- Notes:**
- The optional rear device bay supports either 1 SFF drive or 1 Dual uFF (2x M.2 drives) in an HPE SmartCarrier M.2 (SCM).
  - When the Dual uFF is installed, the M.2 drives are recognized as 101 and 102.
  - Embedded 1Gb Ethernet 4-Port 331i Adapter shown above is not available on all models

### Technical Specifications

#### System Unit

**Dimensions** (Height x Width x Depth)

##### SFF Drives

- 4.29 x 43.46 x 70.7 cm
- 1.69 x 17.11 x 27.83 in

##### LFF Drives

- 4.29 x 43.46 x 74.98 cm
  - 1.69 x 17.11 x 29.5 in
- 

**Weight** (approximate)

- **13.04 kg (28.74 lb)**

SFF minimum: One drive, one processor, one power supply, two heatsinks, one Smart Array controller, and five fans.

- **16.27 kg (35.86 lb)**

SFF maximum: 10 drives, two processors, two power supplies, two heatsinks, one Smart Array controller and seven fans.

- **13.77 kg (30.36 lb)**

LFF minimum: one drive, one processor, one power supply, two heatsinks, one Smart Array controller and five fans.

- **16.78 kg (37 lb)**

LFF maximum: Four drives, two processors, two power supplies, two heatsinks, one Smart Array controller and seven fans.

---

**Input Requirements** (per power supply)

#### Rated Line Voltage

- For 1600W (Platinum): 200-240 VAC
  - For 800W (Titanium) Power Supply: 200-240 VAC
  - For 800W (Platinum): 100-240 VAC
  - For 800W (Universal) Power Supply: 200-277 VAC
  - For 800W (-48VDC): -40 Vdc to -72 Vdc
  - 500W (Platinum) Power Supply: 100-240 VAC
- 

#### BTU Rating

##### Maximum

---

### Technical Specifications

- For 1600W Power Supply: 5918 BTU/hr (at 200 VAC), 5888 BTU/hr (at 220 VAC), 5884 BTU/hr (at 240 VAC)
  - For 800W (Titanium) Power Supply: 2905 BTU/hr (at 200 VAC), 2899 BTU/hr (at 220 VAC), 2893 BTU/hr (at 240 VAC)
  - For 800W (Platinum) Power Supply: 3067 BTU/hr (at 100 VAC), 2958 BTU/hr (at 200 VAC), 2949 BTU/hr (at 240 VAC)
  - For 800W (Universal) Power Supply: 2964 BTU/hr (at 200 VAC), 2951 BTU/hr (at 230 VAC), 2936 BTU/hr (at 277 VAC)
  - For 800W(-48Vdc) Power Supply: 2983 BTU/hr (at -40 Vdc), 2951 BTU/hr (at -48Vdc), 2912 BTU/hr (at -72Vdc)
  - For 500W (Platinum) Power Supply: 1902 BTU/hr (at 100 VAC), 1840 BTU/hr (at 200 VAC), 1832 BTU/hr (at 240 VAC)
- 

### Power Supply Output (per power supply)

#### Rated Steady-State Power

- For 1600W Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
- For 800W (Titanium) Power Supply: 800W (at 200 VAC), 800W (at 240 VAC), 800W (at 240 VDC) for China only
- For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
- For 800W (Universal) Power Supply: 800W (at 200 VAC), 800W (at 277 VAC)
- For 800W (-48VDC) Power Supply: 800W (at -40 Vdc), 800W (at -72Vdc)
- For 500W (Platinum) Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VDC) input for China only

#### Maximum Peak Power

- For 1600W Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
  - For 800W (Titanium) Power Supply: 800W (at 200 VAC), 800W (at 240 VAC), 800W (at 240 VDC) for China only
  - For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
  - For 800W (Universal) Power Supply: 800W (at 200 VAC), 800W (at 277 VAC)
  - For 800W (-48VDC) Power Supply: 800W (at -40 Vdc), 800W (at -72Vdc)
  - For 500W (Platinum) Power Supply: 500W (at 100 VAC), 500W (at 240 VAC), 500W (at 240 VDC) input for China only
- 

### System Inlet Temperature

#### Standard Operating Support

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.

### Technical Specifications

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL:

<http://www.hpe.com/servers/ashrae>

### Extended Ambient Operating Support

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the

URL: <http://www.hpe.com/servers/ashrae>

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

### Non-operating

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

---

### Relative Humidity (non-condensing)

#### Operating

8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.

#### Non-operating

5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

---

### Altitude

#### Operating

3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

#### Non-operating

9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

---

### Technical Specifications

#### Emissions Classification (EMC)

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

#### HPE Smart Array

For latest information on **HPE Smart Array Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers** please refer to their QuickSpecs. (E208i-a,E208i-p,E208e-p,P408i-a,P408i-p,P408e-p,P816i-a)

#### Acoustic Noise

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Configuration SKU	Entry	Base	Performance
<b>Idle</b>			
LWAd	5.1 B	5.1 B	5.2 B
LpAm	35 dBA	35 dBA	36 dBA
<b>Operating</b>			
LWAd	5.3 B	5.2 B	5.9 B
LpAm	36 dBA	38 dBA	45 dBA

**Notes:** Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only.

#### Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the **Hewlett Packard Enterprise web site**. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

### Summary of Changes

Date	Version History	Action	Description of Change
03-Aug-2020	Version 36	Changed	<p>Overview, Pre-Configured Models, Core Options and Additional Options sections were updated.</p> <p>Added Pensando DSP for HPE iLO Management ALOM Module</p> <p>Added new NVMe RI &amp; MU SSD SKUs</p> <p>Added SN1610E 32Gb Fibre Channel HBAs</p> <p>Obsolete SKUs were removed from the QuickSpecs.</p>
06-Jul-2020	Version 35	Changed	<p>Standard Features, Additional Options and Core Options sections were updated.</p> <p>Renamed Network Interface Card descriptions to include chipset</p> <p>Corrected UPI link quantity for Gold 6xxx-R refresh processors</p>
15-Jun-2020	Version 34	Changed	Core Options section was updated.
01-Jun-2020	Version 33	Changed	<p>Overview, Configuration Information, Core Options, Standard Features and Additional Options sections were updated.</p> <p>Obsolete SKUs were removed</p>
06-Apr-2020	Version 32	Changed	Overview, Standard Features, Pre-Configured Models, Configuration Information, Core Options and Additional Options sections were updated.
16-Mar-2020	Version 31	Changed	Standard Features, Configuration Information and Core Options sections were updated.
24-Feb-2020	Version 30	Changed	<p>Overview, Pre-Configured Models, Service and Support, Configuration Information, Core Options and Additional Options sections were updated.</p> <p>Additional 2nd Generation Intel® Xeon® Scalable Processors and pre-configured models powered by them were added.</p>
03-Feb-2020	Version 29	Changed	<p>Overview, Standard Features, Core Options, Pre-configured Models and Configuration Information and Additional Options sections were updated.</p> <p>European Union (EU) Lot 9 regulation information was added.</p> <p>Obsolete SKUs were removed</p>
02-Dec-2019	Version 28	Changed	<p>Overview, Pre-configured Models, Configuration Information, Core Options, Additional Options and Technical Specifications sections were updated.</p> <p>Obsolete SKUs were removed</p>
07-Oct-2019	Version 27	Changed	Overview, Pre-configured Models, Core Options, and Additional Options sections were updated.
03-Sep-2019	Version 26	Changed	Overview, Standard Features, Pre-configured Models, SMB Models, China Specific, Configuration Information - Factory Integrated Models and Core Options sections were updated.
12-Aug-2019	Version 25	Changed	Overview, Standard, Features, Optional Features, SMB Models, Configuration Information-Factory Integrated Models, China Specific, Core Options, Storage sections were updated.
01-Jul-2019	Version 24	Changed	<p>The 5218N wattage has changed from 105 to 110W TDP</p> <p>The U.S. version of QuickSpecs is no longer being updated, please reference the Worldwide QuickSpecs for latest information.</p>



### Summary of Changes

03-Jun-2019	Version 23	Changed	Standard Features, SMB Models, Pre-configured Models, China Specific, Configuration Information, Additional Options and Core Options sections were updated.  New SKUs were added and Obsolete SKUs were removed.
15-Apr-2019	Version 22	Changed	Overview, Standard Features, SMB Models, Pre-configured Models, China Specific, Configuration Information and Core Options sections were updated.
02-Apr-2019	Version 21	Changed	Overview, Standard Features and Pre-configured Models sections were updated.
04-Feb-2019	Version 20	Changed	Overview, Standard Features, Configuration Information, Core Options and Optional Features sections were updated.
03-Dec-2018	Version 19	Changed	Overview, Standard Features, Pre-configured Models, Core Options and Storage sections were Updated.

Date	Version History	Action	Description of Change
15-Oct-2018	Version 18	Changed	SKUs descriptions were updated in Core Options section  Obsolete SKUs were removed from Core Options section.
01-Oct-2018	Version 17	Changed	Overview, Standard Features, Configuration Information, Core Options, Additional Options, and Memory sections were updated.  SKU descriptions were updated.
13-Aug-2018	Version 16	Changed	Maximum Storage and Additional Options were revised.
06-Aug-2018	Version 15	Changed	Added new AMD and NVIDIA Graphics card options.  Added new Smart Array P824i-p MR Gen10 (24 Internal Lanes/4GB Cache/CacheCade) 12G SAS PCIe Controller.  Added new Solid State Drives offering.  Pre-Configured Models, Core Options, and Additional Options were revised.  Obsolete SKUs were removed from the QuickSpecs.
11-Jun-2018	Version 14	Changed	Smart Buy Models section for the NA version was revised.
04-Jun-2018	Version 13	Changed	New SSD offering was added to the HPE Drivers section.  Core Options, Additional Options, and Memory were revised.  Obsolete SKUs were removed from the QuickSpecs.
07-May-2018	Version 12	Changed	New SMB models offering was added.  Riser Information and power supply section were revised.  Obsolete SKUs were removed from the QuickSpecs.
02-Apr-2018	Version 11	Changed	Standard Features, Core Options and Additional Options were revised.  Obsolete SKUs were removed from the QuickSpecs.
05-Mar-2018	Version 10	Removed	Obsolete SKUs were removed from the QuickSpecs.
05-Feb-2018	Version 9	Added	Added new SATA SSDs, NVMe drives and PCIe accelerator cards.
18-Dec-2017	Version 8	Changed	Network controller under Configuration Information - Factory Integrated Models section was revised.
04-Dec-2017	Version 7	Changed	Added new Entry level WW Model-1 sku.  HPE Specific IST Processor offering Gold 6143 and Platinum 8165 bins were added.

### Summary of Changes

			<p>Added new High capacity 12TB LFF drives and Large capacity 15.3TB SSDs.</p> <p>Standard Features, Pre-configured Models, Core Options, Additional Options, Memory, and Acoustic Noise were revised.</p>
23-Oct-2017	Version 6	Changed	<p>Memory speed table was updated to display the 61XX processors running at 2666MT/s.</p>
16-Oct-2017	Version 5	Changed	<p>128GB Memory was added Riser table was added under Core Options.</p> <p>Platform Information, Processors table under Standard Features, FlexibleLOM Adapters, GPU table under Core Options, HPE Storage Controllers, and Rail Kits were revised.</p>
25-Sep-2017	Version 4	Changed	<p>New Gold Processors were added.Added new Hard Drive and SSD offering.</p> <p>GPU information table was added.</p> <p>Platform Information, Core Options, Additional Options, and Storage section were revised.</p> <p>Obsolete SKUs were removed from the QuickSpecs.</p>
14-Aug-2017	Version 3	Changed	<p>Smart Buy Models section was revised (NA version only).</p>
07-Aug-2017	Version 2	Changed	<p>Added new Solid State Drives offering to the HPE Drives section.</p> <p>Added Support Services under Additional Options.</p> <p>Platform Information, Optional Features, Core Options, Additional Options, Memory, and Storage section were revised.</p>
11-Jul-2017	Version 1	New	<p>New QuickSpecs.</p>

### Copyright

---

Make the right purchase decision. Contact our presales specialists.



Chat



Email



Call



---

© Copyright 2020 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.

Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

a00008159enw - 15929 - Worldwide - V36 - 03-August-2020